


Open Grommets

pro-POWER



Specifications:

Max. Constant Working Temperature : 70°C
Min. Constant Temperature : -35°C
Black PVC Normal Shore Hardness : 43°C to 55°C

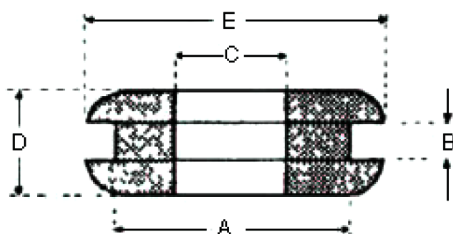

Part Number Table

Description	A	B	C	D	E	Part Number
Grommet	4.8	1.6	3.2	6.4	8	PV2 GROMMET PK 100
	6.4	1.2	4.8	6	9.5	PV710 GROMMET PK 100
	6.4	1.6	4	6.4	9.5	PV5 GROMMET PK 100
	6.4	1.6	4.8	7	9.5	PV6 GROMMET PK 100
	8	1.6	4.8	6.4	11.1	PV24 GROMMET PK 100
	9.5	1.6	4.8	6.8	12.7	PV35 GROMMET PK 100
	9.5	1.6	6.4	4.8	14.3	PV36A GROMMET PK 100
	9.5	1.6	6.4	6.4	14.3	PV36 GROMMET PK 100
	9.5	1.6	7.5	6.4	13.5	PV45 GROMMET PK 100
	9.5	1.6	8	4.8	14.3	PV37A GROMMET PK 100
	10.3	1.6	8	6.4	15.9	PV44 GROMMET PK 100
	11.1	1.6	7.2	6.4	15.9	PV837 GROMMET PK 100
	11.1	1.6	8	4.8	14.3	PV50A GROMMET PK 100
	11.9	2	9.5	6.8	17.5	PV233 GROMMET PK 100
	12.7	1.6	9.5	6.3	15.9	PV53 GROMMET PK 100
	14.3	1.6	11.1	6.4	19	PV64 GROMMET PK 100
	19	1.6	12.7	6.4	25.4	PV73A GROMMET PK 100
	20	1.6	15.9	6.4	23.8	PV73M GROMMET PK 100
	25.4	1.6	19	7.5	30	PV93 GROMMET PK 100

Dimensions : Millimetres

pro-POWER