


Cable Gland and Locknut

pro-POWER

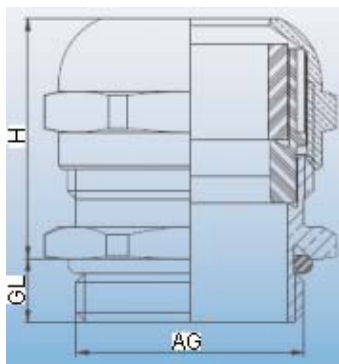


Features :

- Material : Nickel plated brass
- Clamping Insert : PA (nylon)
- Seal : NBR
- O-ring : Buna-N
- Protection : IP 68 - 5 bar within the specific clamping range
- Operating Temperature : -40°C to +100°C (static)
: -20°C to +80°C (dynamic)

Specification Table

AG	 mm	GL (mm)	H (mm)	 mm
M12 × 1.5	3 - 6.5	6	19.5	14
M16 × 1.5	4.5 - 10		22	19
M20 × 1.5	6 - 12		24.5	22
M25 × 1.5	9 - 17	7	26	29
M32 × 1.5	11 - 21	8	34	34
M40 × 1.5	19 - 28		36.5	44
M50 × 1.5	27 - 35	9	45	54
M63 × 1.5	34 - 48	10	48	67

Dimensions : Millimetres

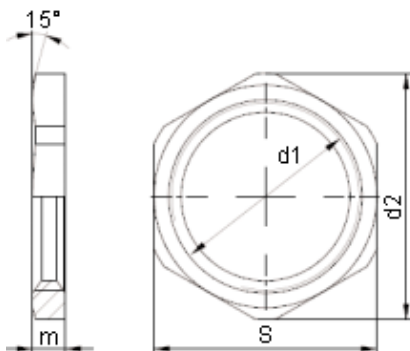

Dimensions Table

d1	d2	s	m
M12 × 1.5	16.6 ±0.2	15	2.8 ±0.2
M16 × 1.5	21 ±0.2	19	
M20 × 1.5	25.5 ±0.2	23	3 ±0.2
M25 × 1.5	32 ±0.3	29	3.5 ±0.3
M32 × 1.5	40 ±0.3	36	4 ±0.3
M40 × 1.5	49 ±0.3	45	4.5 ±0.3
M50 × 1.5	60 ±0.3	55	5.5 ±0.3
M63 × 1.5	76 ±0.3	70	6 ±0.3

Dimensions : Millimetres

pro-POWER

Cable Gland and Locknut

pro-POWER

Part Number Table

Description	Part Number
Gland, Nickel, M12, 3 - 6.5 mm, PK50	MLCM12
Gland, Nickel, M16, 4.5 - 10 mm, PK50	MLCM16
Gland, Nickel, M20, 6 - 12 mm, PK50	MLCM20
Gland, Nickel, M25, 9 - 17 mm, PK25	MLCM25
Gland, Nickel, M32, 11 - 21 mm, PK25	MLCM32
Gland, Nickel, M40, 19 - 28 mm, PK10	MLCM40
Gland, Nickel, M50, 27 - 35 mm, PK5	MLCM50
Gland, Nickel, M63, 34 - 48 mm, PK5	MLCM63
Locknut, Nickel, M12, PK50	1162120050
Locknut, Nickel, M16, PK50	1162160050
Locknut, Nickel, M20, PK50	1162200050
Locknut, Nickel, M25, PK25	1162250050
Locknut, Nickel, M32, PK25	1162320050
Locknut, Nickel, M40, PK10	1162400050
Locknut, Nickel, M50, PK5	1162500050
Locknut, Nickel, M63, PK5	1162630050

pro-POWER