
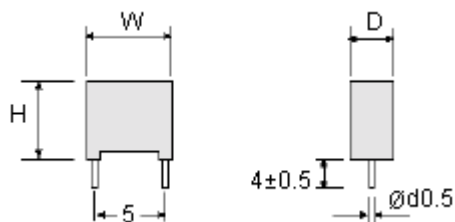


5 mm Plastic Film Capacitors **multicomp**

Features:

- A range of industry standard, 5mm, pitch metallised polyester capacitors, stacked construction
- Epoxy resin encapsulated in flame retardant plastic cases with stand-off feet
- Metallised Polyester
- Industry standard pitch of 5 mm
- Tolerance of 10%
- Body colour : grey

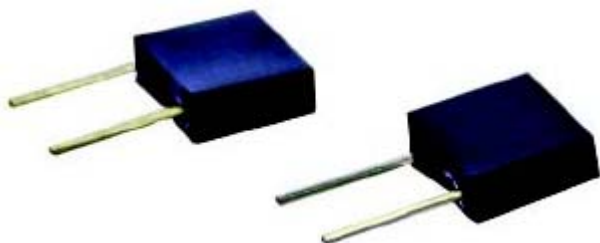

Dimensions : Millimetres

Specifications:

Working Voltage at 85°C	: 63 V dc / 40 V ac
Capacitance Intolerance	: +10%
Full Operating Temperature Range	: -55°C to +85°C
Maximum Temperature with Voltage Derating	: +105°C
Insulation Resistance / Time Constant	: ≥15,000 MΩ (≥5,000 seconds C ≥0.33 μF)
Dissipation Factor	: ≥1% at 1 KHz

Specification Table

Volts	Type (μF)	Maximum Width (W)	Maximum Height (H)	Maximum Depth (D)	Part Number
63	0.001	7.2	6.5	2.5	MCPBSFC-1J102KA45
	0.0022				MCPBSFC-1J222KA45
	0.0047				MCPBSFC-1J472KA45
	0.01				MCPBSFC-1J103KA45
	0.022				MCPBSFC-1J223KA45
	0.047				MCPBSFC-1J473KA45
	0.1				MCPBSFC-1J104KA45
	0.47		7.5	3.5	MCPBSFC-1J4474KB45
	1		10		MCPBSFC-1J105KB45

Dimensions : Millimetres