
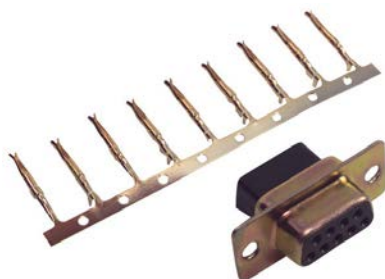
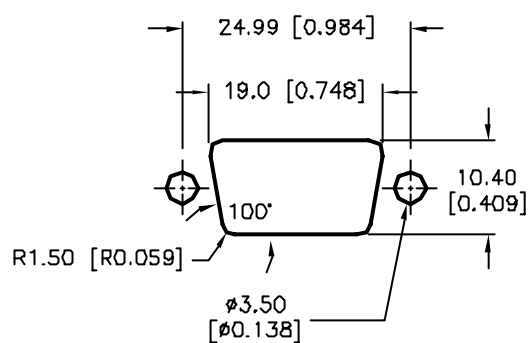


D Sub Connector Crimp Type, 9Pin


**RoHS
Compliant**


Specification

Shell	: Steel, Tin-Plated
Insulator	: Glass Filled-Nylon, Black
Current Rating	: 5 Amps
Dielectric Strength	: 1,000V for One Minute
Insulator Resistance	: 1,000MΩ Min. at 500V AC
Temperature	: -50°C to +105°C
Contact	: Brass, Stamped 5u" Gold-Plated on contact area, Gold Flash on Crimp area.

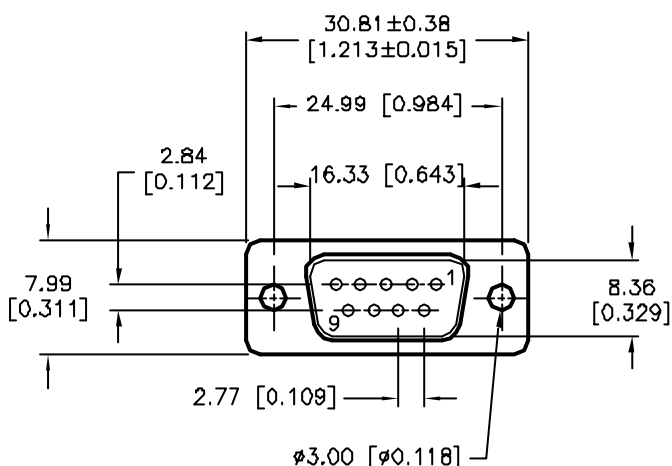

Panel Cutout


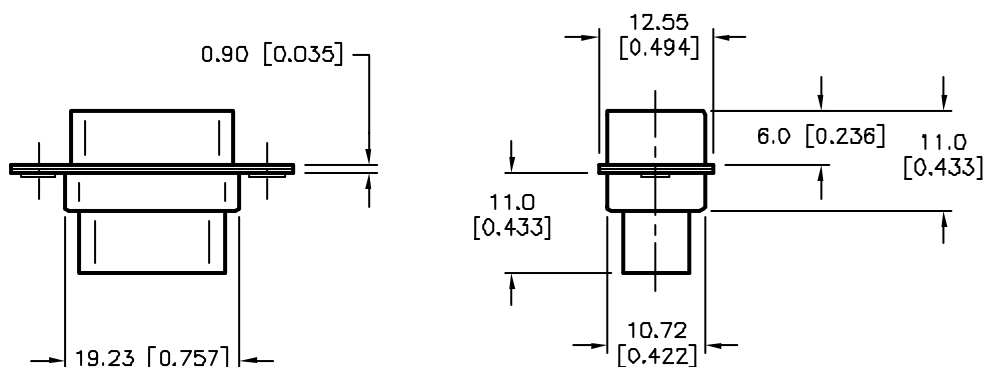


Dimensions : Millimeters (Inches)



D Sub Connector Crimp Type, 9Pin



Crimp Contacts

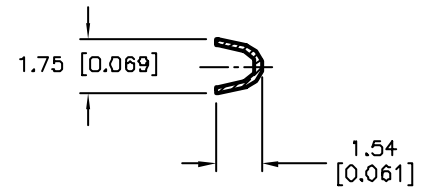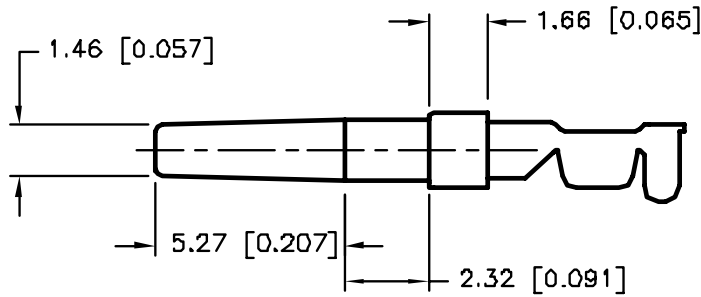

SECTION B-B

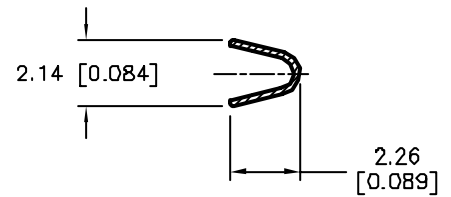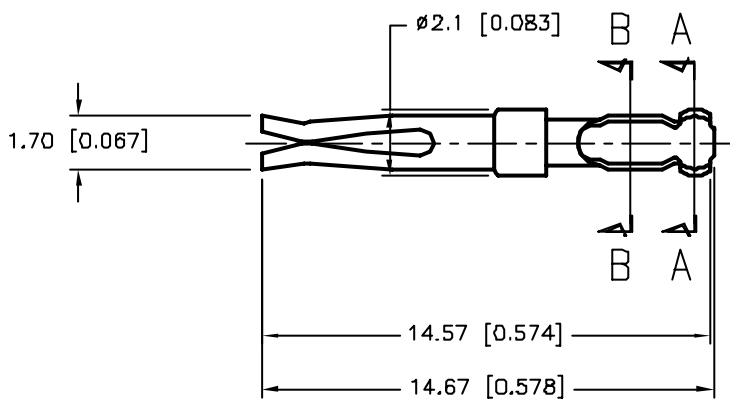

SECTION A-A

Dimensions : Millimeters (Inches)

Part Number Table

Description	Part Number
9 Pin Crimp Type D-Sub Socket	SPC15462

