




D Sub Connector

15Pos, Receptacle


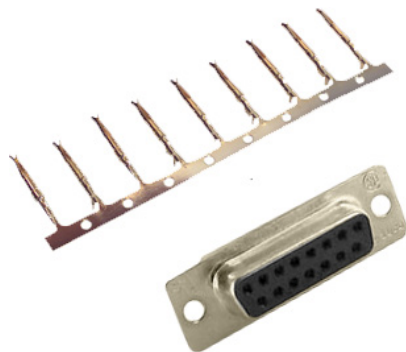


Specifications

Connector Type	: D Sub
No. of Contacts	: 15
D Sub Shell Size	: DA
Gender	: Receptacle
Contact Termination	: Crimp
Shell	: Steel, Tin-Plated
Insulator	: Glass Filled-Nylon, Black
Current Rating	: 5 Amps
Insulator Resistance	: 1,000MΩ Min. at 500V AC
Temperature	: -50°C to +105°C
Dielectric Strength	: 1,000V for One Minute

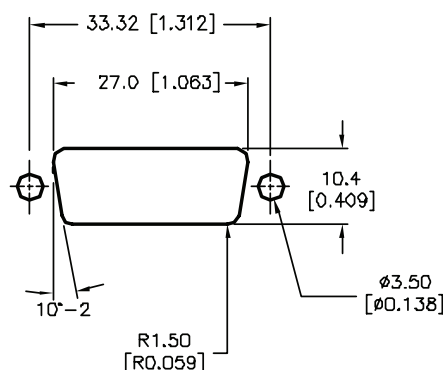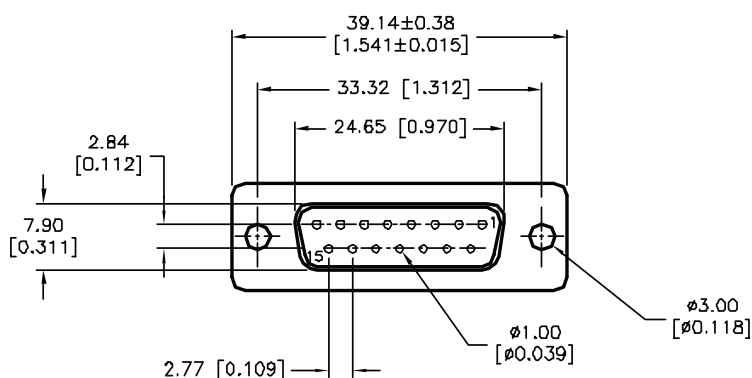


Panel Cutout

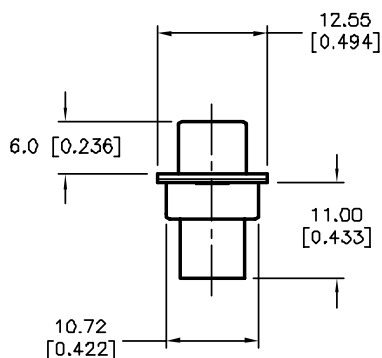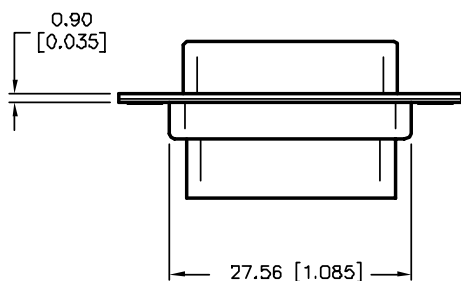

Dimensions : Millimetres (Inches)



D Sub Connector

15Pos, Receptacle

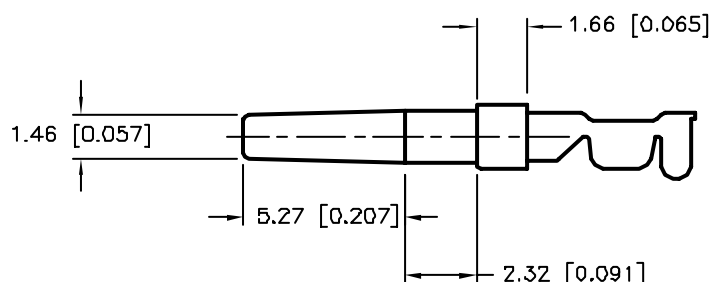


Specifications

Contact: Brass, Stamped 5μ" Gold Plated on Contact Area, Gold Flash on Crimp Area.

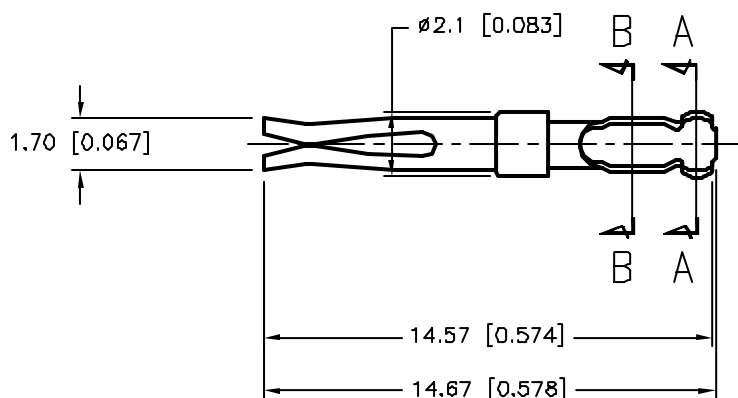

Section B-B



Section A-A

Dimensions : Millimetres (Inches)

Part Number Table

Description	Part Number
15 Pin Crimp Type D-Sub Socket	SPC15308

