




D Sub Connector

Standard, 25Pos, Plug





Specifications

Shell	: Steel, Tin-Plated
Insulator	: Glass Filled-Nylon, Black
Current Rating	: 5 Amps
Dielectric Strength	: 1,000V for One Minute
Insulator Resistance	: 1,000MΩ Min. at 500V AC
Temperature	: -50°C to +105°C
Connector Type	: D-Sub
No. of Contacts	: 25
D-Sub Shell Size	: DB
Gender	: Plug

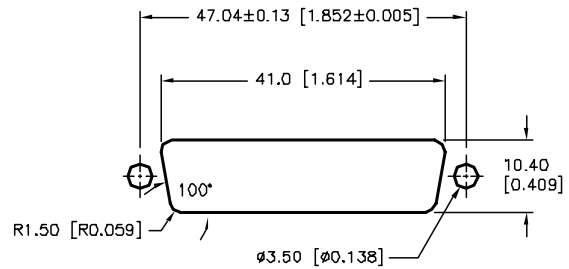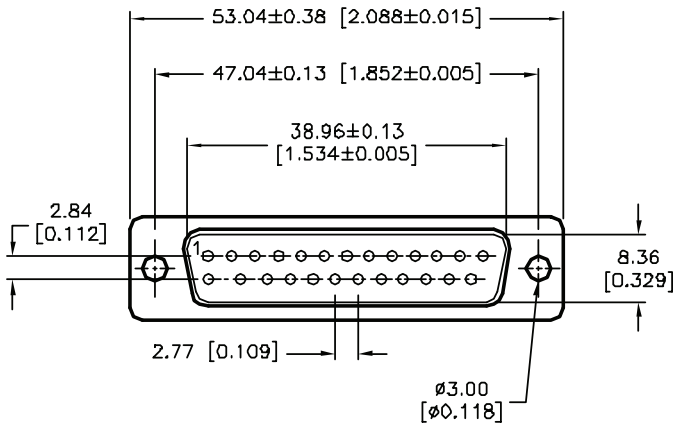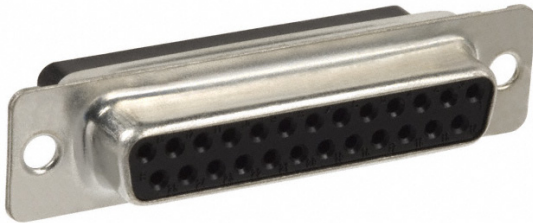


Panel Cutout

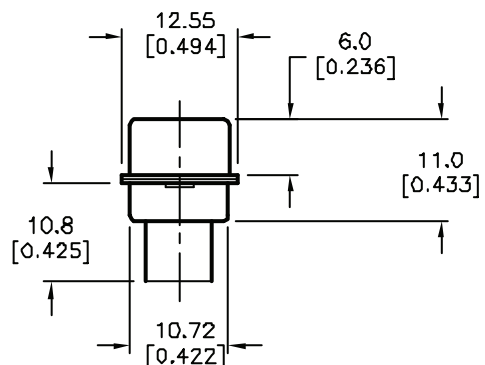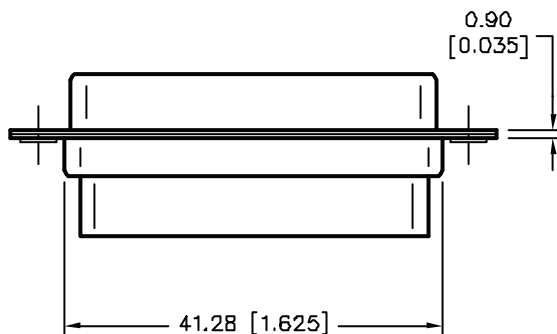

Dimensions : Millimeters (Inches)



D Sub Connector

Standard, 25Pos, Plug

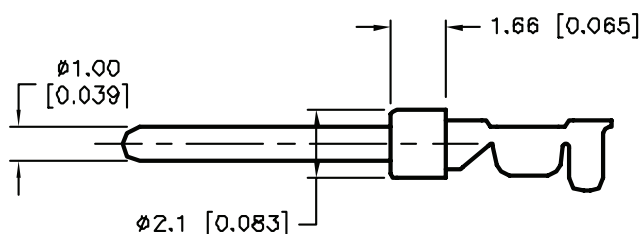


Specifications

Contact : Brass, Stamped 5μ" Gold-Plated

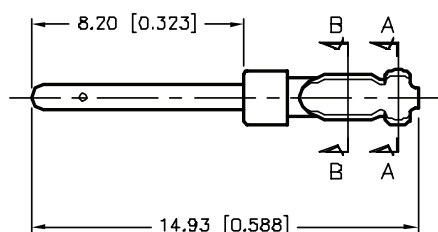

Section B-B

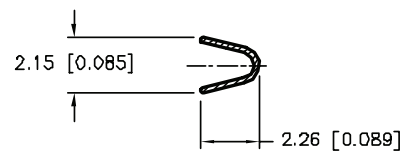

Section A-A

Dimensions : Millimeters (Inches)

Part Number Table

Description	Part Number
25 Pin Crimp Type D-Sub Plug	SPC15448