



D-Sub Socket

50 Pin Crimp Type





Specifications:

Shell	: Steel, Tin-Plate
Insulator	: Glass Filled-Nylon, Black
Current Resistance	: 1,000MΩ Min at 500V AC
Temperature	: -50°C to +105°C
Dielectric Strength	: 1,000V for One Minute

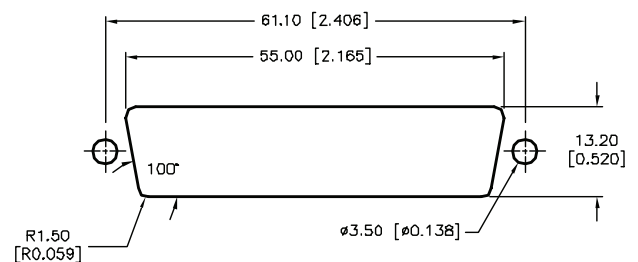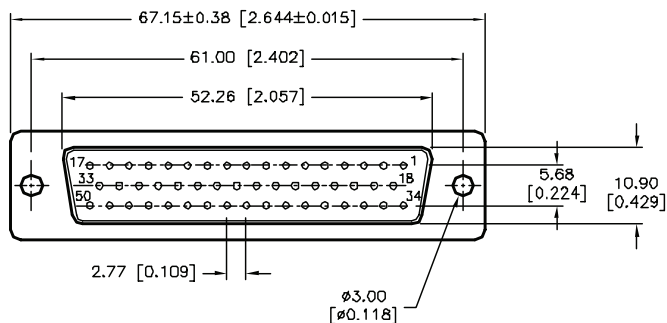

Panel Cutout

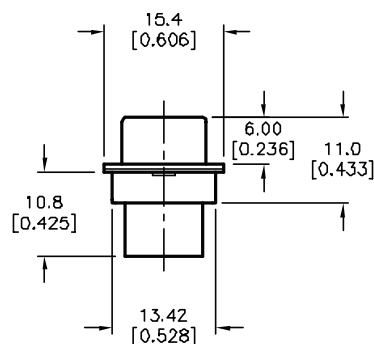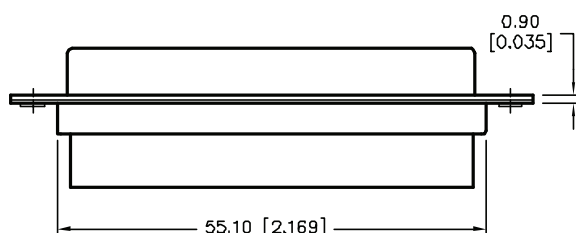

Dimensions : Millimeters (Inches)





D-Sub Socket

50 Pin Crimp Type



Specifications:

Contact : Brass, Stamped 5μ" Gold-Plated on Contact Area,
Gold Flash on Crimp Area

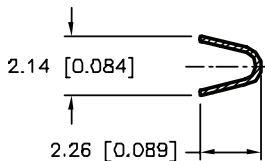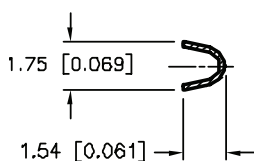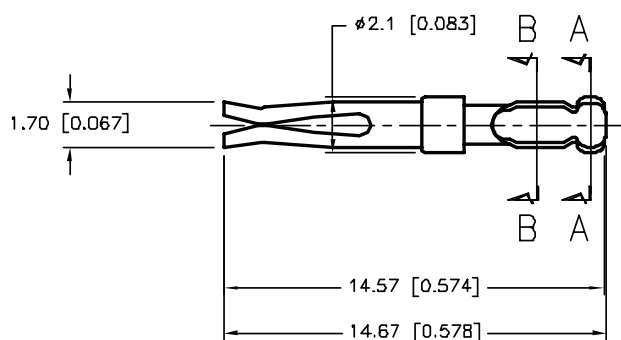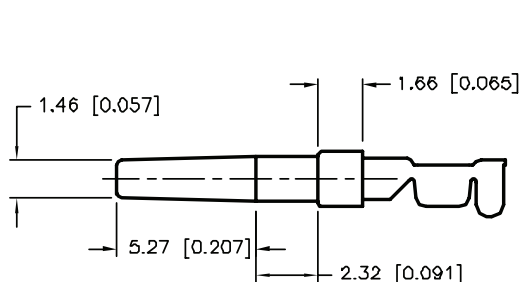

Crimp Contacts

Section B-B

Section A-A

Dimensions : Millimeters (Inches)

Part Number Table

Description	Part Number
50 Pin Crimp Type D-Sub Socket	SPC15311

