

D-Sub Socket


High Density, 26 Ways

**RoHS
Compliant**



Specifications:

Connector Type	: High Density D-Sub
Shell	: Steel, Tin Plated
Insulator	: PBT + 30% Fibre Glass, Black
Retention Springs	: Stainless Steel
No. of Contacts	: 26
D-Sub Shell Size	: DA
Connector Body Material	: Metal
Gender	: Receptacle
Operating Temperature	: -55°C to +105°C

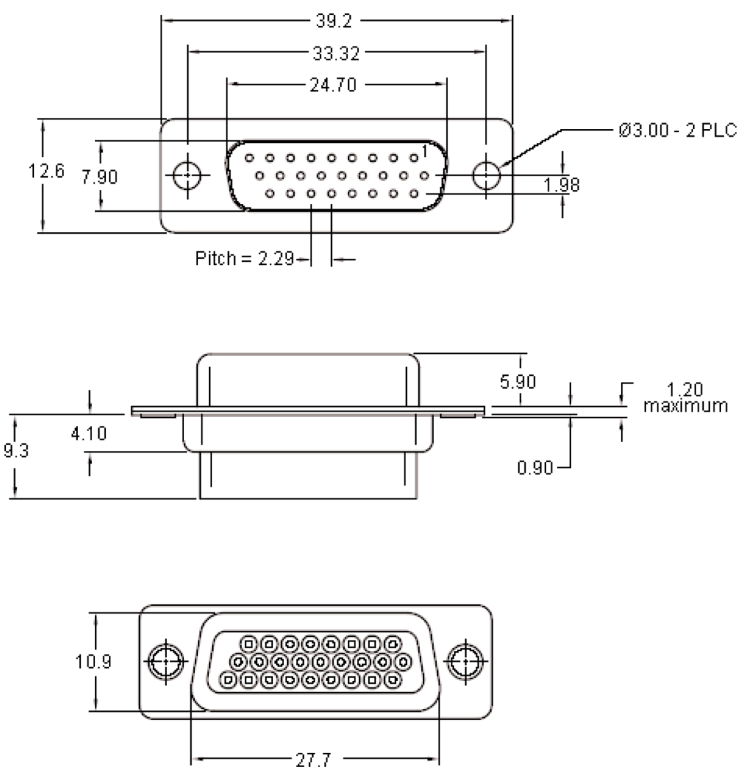

Dimensions : Millimetres

Part Number Table

Description	Part Number
D-Sub Socket - High Density, 26 Ways	SPC15252