


D-Sub Socket

High Density, 44 Ways






**RoHS
Compliant**

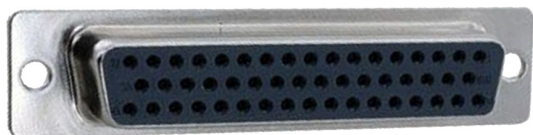

Specifications:

Connector Type	: High Density D-Sub
Shell	: Steel, Tin Plated
Insulator	: PBT + 30% Fibre Glass, Black
Retention Springs	: Stainless Steel
No. of Contacts	: 44
D-Sub Shell Size	: DB
Connector Body Material	: Metal
Gender	: Receptacle
Operating Temperature	: -55°C to +105°C

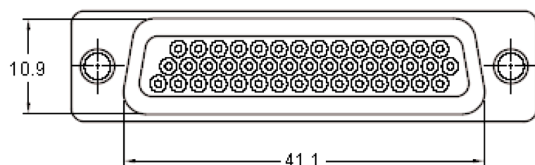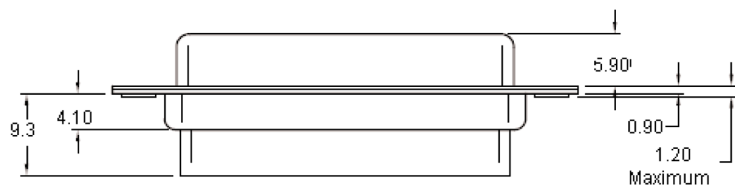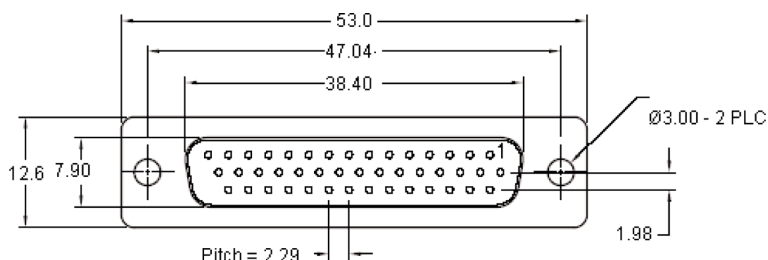

Dimensions : Millimetres

Part Number Table

Description	Part Number
D-Sub Socket - High Density, 44 Ways	SPC15235

