

Gender Changer

DB15 Pin, Female-Female






**RoHS
Compliant**




Specifications:

Convert From Connector	: Standard D-Sub
Convert From Positions	: 15
Convert From Gender	: Receptacle
Convert To Gender	: Receptacle
Contact Material	: Brass
Contact Plating	: Gold over Nickel
Current Rating	: 3A
Dielectric Strength	: 1,000V AC for One Minute
Insulator Resistance	: 1,000MΩ Min. at 500V DC
Operating Temperature	: -55°C to +105°C

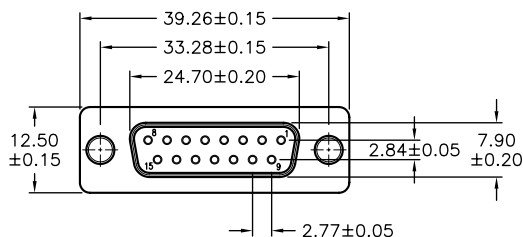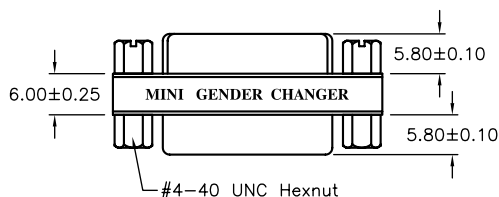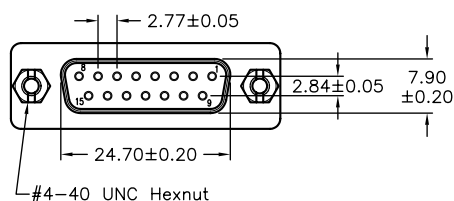

Dimensions : Millimetres

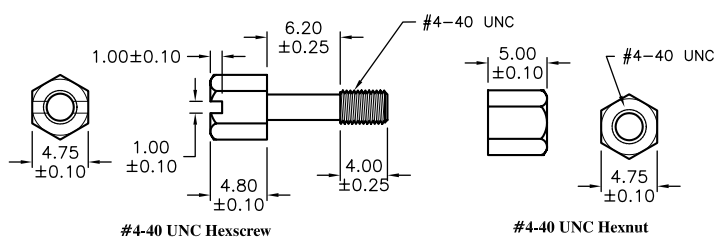

PIN OUT

25P Female		25P Female
1	— — — —	1
2	— — — —	2
3	— — — —	3
	⋈	
24	— — — —	24
25	— — — —	25
G	— — — —	G

Part Number Table

Description	Part Number
Gender Changer, F-F, 15Way	SPC19826

