

Gender Changer




Specifications:

Connector Type	: Standard D-Sub Gender Changer
Convert From Connector	: High Density D-Sub
Convert From Positions	: 15
Convert From Gender	: Plug
Connector Type A	: HD15 Plug
Connector Type B	: HD15 Plug
Contact Plating	: Gold
Current Rating	: 1.5A
Minimum Insulation Resistance	: 100MΩ
Dielectric Withstanding	: 500V for one minute
Maximum Contact Resistance	: 50MΩ
Operating Temperature	: -20°C to +70°C

Materials:

Housing	: PBT
Contact	: Copper alloy
Shell	: Steel

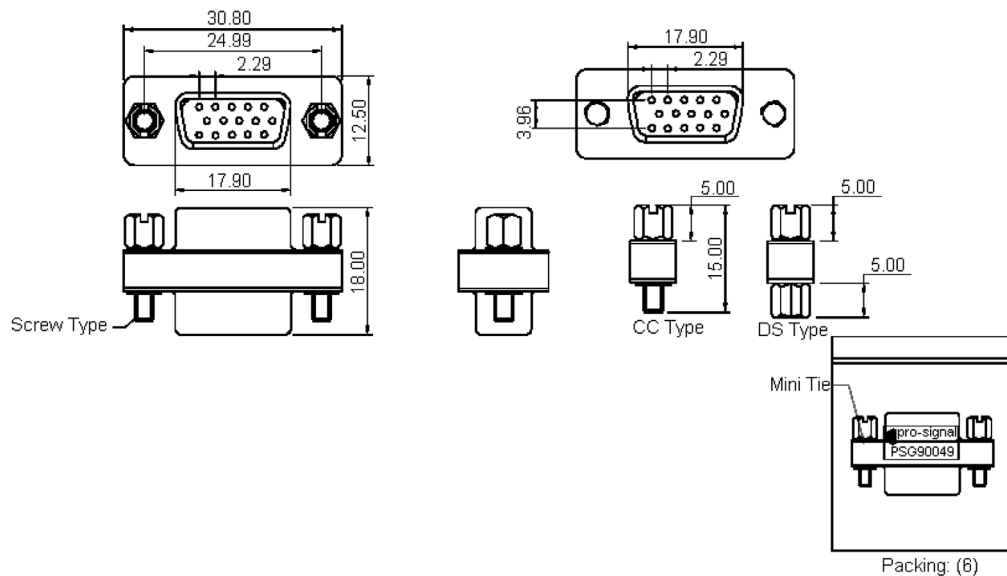

Dimensions : Millimetres

Part Number Table

Description	Part Number
Gender Changer, M-M, HD15Way	GC015 (PSG90049)