


Gender Changer

F-F, HD 15 Way

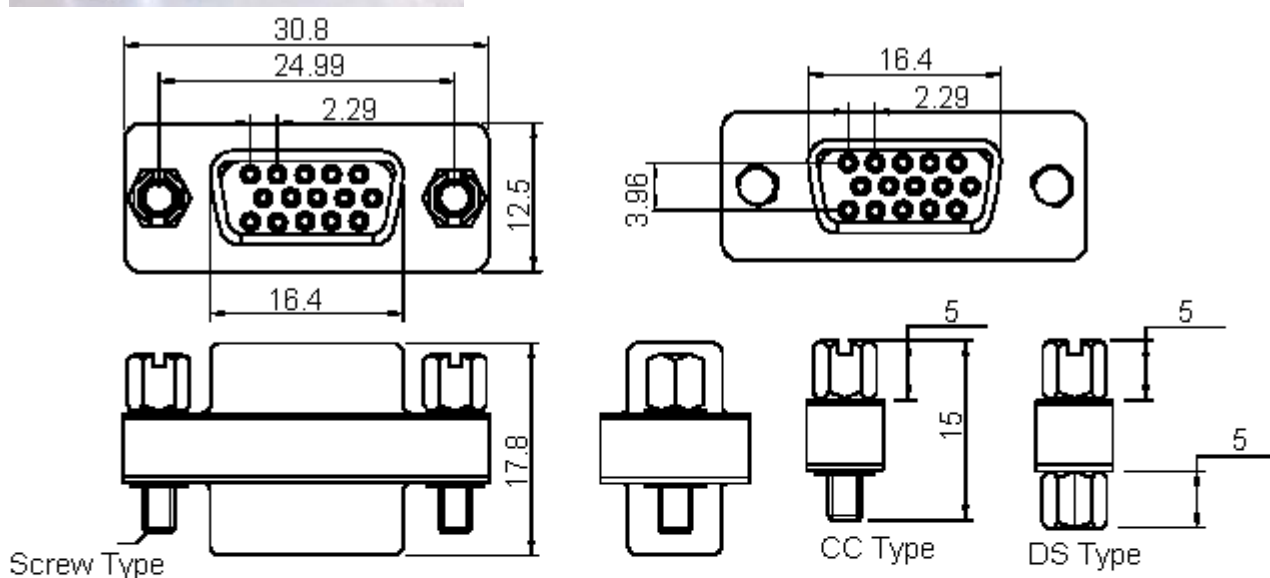


Specifications:

Current Rating	: 1.5 A
Minimum Insulation Resistance	: 100 MΩ
Dielectric Withstanding	: 500 V for one minute
Maximum Contact Resistance	: 50 MΩ
Operating Temperature	: -20°C to +70°C

Materials

Housing	: PB
Contact	: Copper alloy
Shell	: Steel

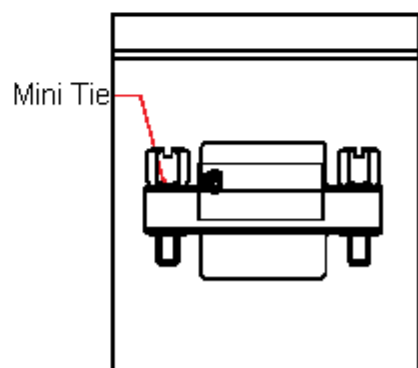

Packing: (6)

Dimensions : Millimetres

Part Number Table

Description	Part Number
Gender Changer, F - F, HD15 Way	GC013 (PSG90050)