D-Sub Mini Gender Changer

DB25 Pin, Female-Female

multicomp

RoHS Compliant

Specifications:

Convert From Connector	: Standard D-Sub
Convert From Positions	: 25
Convert From Gender	: Receptacle
Convert To Gender	: Receptacle
Contact Material	: Brass
Contact Plating	: Gold over Nickel
Current Rating	: 3A
Dielectric Strength	: 1,000V AC for One Minute
Insulator Resistance	: 1,000MΩ Min. at 500V DC
Operating Temperature	: -55°C to +105°C

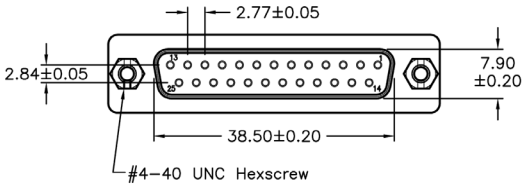

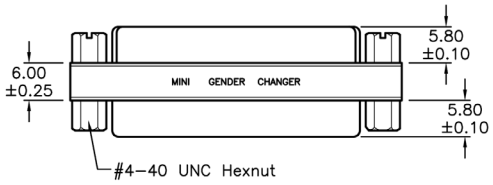

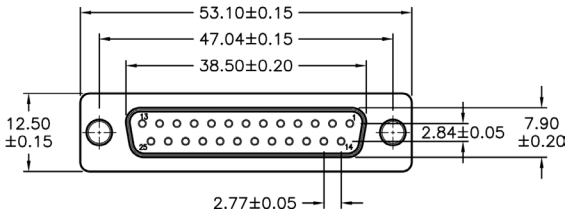

Dimensions : Millimetres

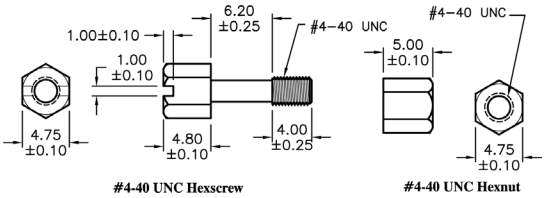



Part Number Table

Description	Part Number
Gender Changer, Female-Female, 25Way	SPC19776

multicomp

© כל הזכויות שמורות - טלמיר אלקטרוניקה בע"מ