

Fast Acting Glass Fuses

MCF05G Series



**RoHS
Compliant**




Features:

- Fast acting, low breaking capacity
- 5 × 20 mm physical size
- Glass tube, nickel-plated brass endcap construction
- Optional axial leads are 0.032 × 1.5 inches copper tinned
- Designed to IEC 60127-2 (32mA - 6.3 A)

Electrical Characteristics:

In	1.5 In	2.1 In	2.75 In		4 In		10 In
	Min.	Max.	Min.	Max.	Min.	Max.	Max.
	(Seconds)		(Seconds)		(Seconds)		(Seconds)
32mA to 100mA	3,600	1,800	0.01	0.5	0.003	0.1	0.02
125mA to 6.3A			0.05	2	0.01	0.3	

Diagram:

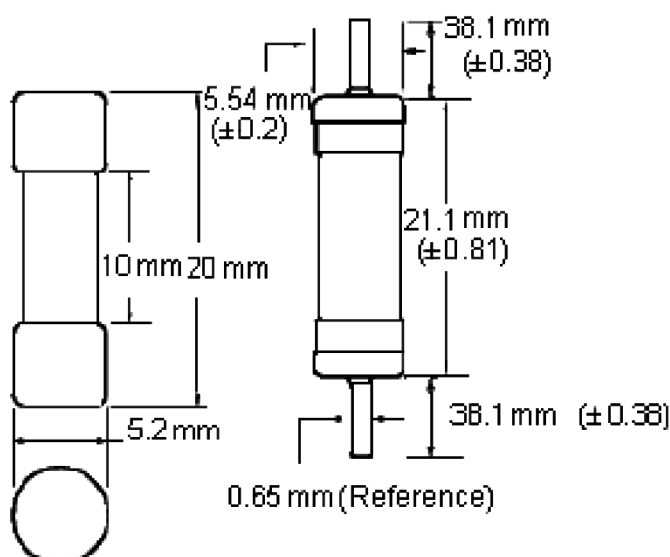

Ratings above 6.3 A have a 0.8 mm diameter lead




Fast Acting Glass Fuses

MCF05G Series



Time - Current Characteristics Curve - Average Melt

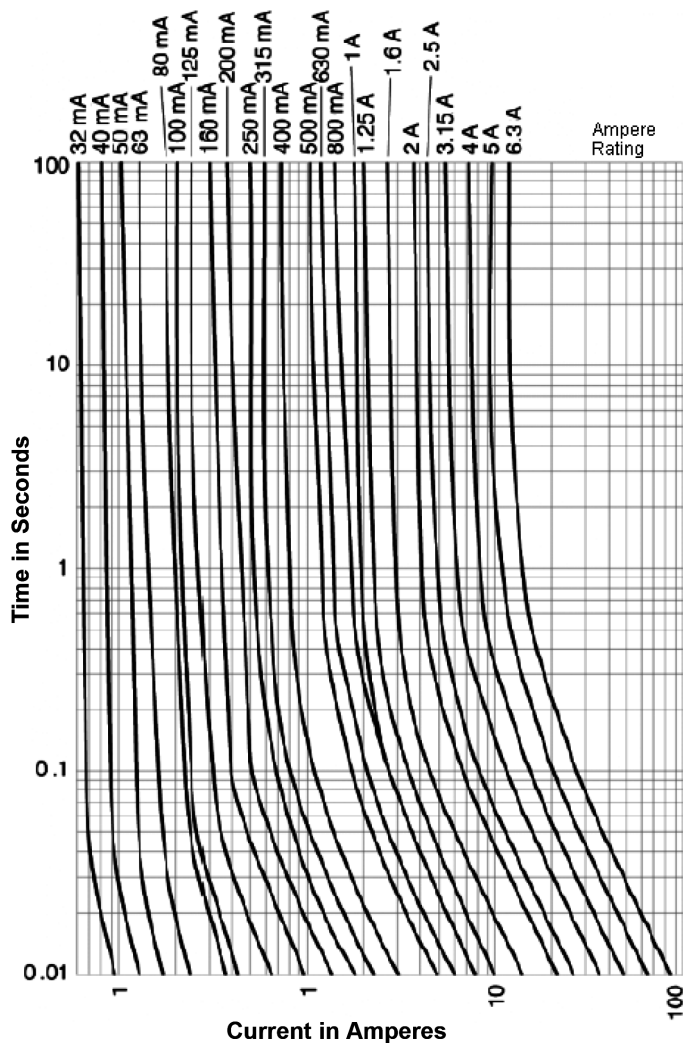

Part Number Table

Voltage Rating (V AC)	Interrupting Rating at Rated Voltage (50 Hz) AC (Amperes)	Typical DC Cold Resistance (Ω)*	Typical Melting I^2t (A ² Sec) AC**	Typical Voltage Drop (mV)***	Part Number
250	35	0.098	0.84	200	MCF05G-1.25A
		2.9	0.005	1,000	MCF05G-125MA
		9.2	0.008	2,000	MCF05G-160MA
		7	0.016	1,700	MCF05G-200MA
		4.5	0.28	1,400	MCF05G-250MA



Fast Acting Glass Fuses

MCF05G Series




Voltage Rating (V AC)	Interrupting Rating at Rated Voltage (50 Hz) AC (Amperes)	Typical DC Cold Resistance (Ω)*	Typical Melting I^2t (A ² Sec) AC**	Typical Voltage Drop (mV)***	Part Number
250	35	3.2	0.58	1,300	MCF05G-315MA
		1.9	0.18	1,100	MCF05G-400MA
		0.27		220	MCF05G-500MA
		0.21	0.35		MCF05G-630MA
		3.9	0.003	1,100	MCF05G-100MA
		0.068	1.6	190	MCF05G-1.6A
		0.044	4.2	150	MCF05G-2A
		0.026	13	130	MCF05G-3.15A
		0.022	22		MCF05G-4A
		0.015	42	120	MCF05G-5A
		0.15	0.67	190	MCF05G-800MA

* DC Cold Resistance (Measured at <10% of rated current)

** Typical Melting I^2t (I^2t was measured at listed interrupting rating and rated voltage)

*** Maximum Voltage Drop (Voltage drop was measured at 20°C ambient temperature at rated current)

Part Number Explanation:

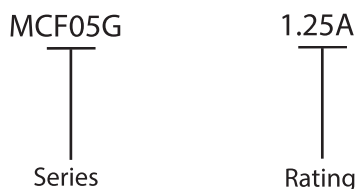

Rating : 100mA, 125mA, 160mA, 200mA, 250mA, 315mA, 400mA, 500mA, 630mA, 800mA, 1A, 1.25A, 1.6A, 2A, 2.5A, 3.15A, 4A, 5A, 6.3A, 8A and 10A

