


Crimp Tool

DURATOOL

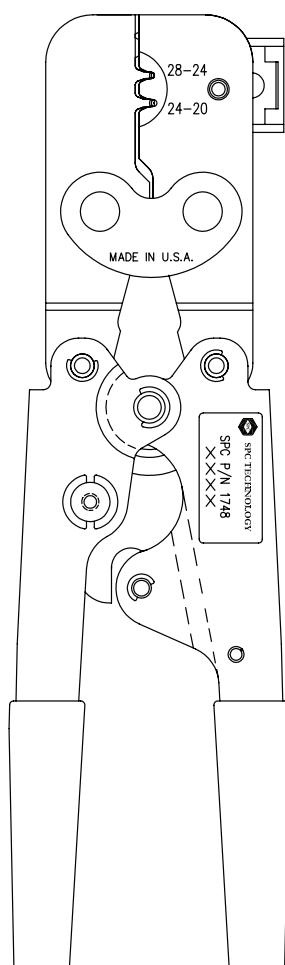

Features:

- Crimps D-subminiature pins and sockets (Ref: AMP 90312)
- Conductor Crimps are "B" type, insulated crimps are "OVAL" which are produced in two cavities: 28 ~ 24AWG and 24 ~ 20AWG
- Load locator and wire stop are provided to orient the pins or sockets during crimping
- Heat treated components
- Black Oxide handles Black Oxide jaw assembly
- Ratchet controlled release. Ratchet set to release when A 60-70 lb. Load is applied approx. 1 3/4" from end of handle
- Blue textured plastisol grips

Gaging Using Soft Wire Solder

| Nest | Conductor | | Insulation | |
|---------|-----------------|---------------|---------------|---------------|
| | H | W | H | W |
| 28 ~ 24 | 0.0305 / 0.0265 | 0.044 / 0.04 | 0.045 / 0.035 | 0.057 / 0.053 |
| 24 ~ 20 | 0.0315 / 0.0275 | 0.057 / 0.053 | 0.065 / 0.055 | 0.064 / 0.06 |

Dimensions : Inches

Part Number Table

| Description | Part Number |
|-------------|-------------|
| Crimp Tool | 1748 |

DURATOOL