


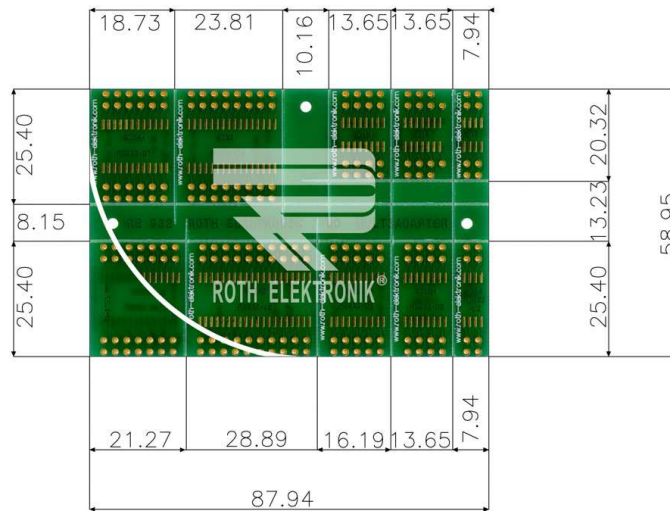

RE932

- Epoxy fibre-glass FR41.50 mm
- Double-sided 35 µm Cu
- Plated through holes (PTH)
- Surface chem. Ni/Au with solder stop mask
- Adaption circuit board for 10 different SO's
- Pitch: 1.27 mm
- Hole diameter 1.00 mm
- Prescratched rated break point for the separation of individual modules from the board
- Size 58.50 x 88.00 mm

Module-No. Pitch mil Pin Size (mm)

RE932-01 1.270 mm 0.50 8 3.90 (153 mil) RE932-02 1.270 mm 0.50 8-w 7.50 (295 mil) RE932-03 1.270 mm 0.50 14 3.90 (153 mil) RE932-04 1.270 mm 0.50 16 3.90 (153 mil) RE932-05 1.270 mm 0.50 16-w 7.50 (295 mil) RE932-06 1.270 mm 0.50 20-w 7.50 (295 mil) RE932-07 1.270 mm 0.50 24-w 7.50 (295 mil) RE932-08 1.270 mm 0.50 28-w 7.50 (295 mil) RE932-09 1.270 mm 0.50 32 7.50 (295 mil) RE932-10 1.270 mm 0.50 40 (SOJ) 10.16 (400 mil)