


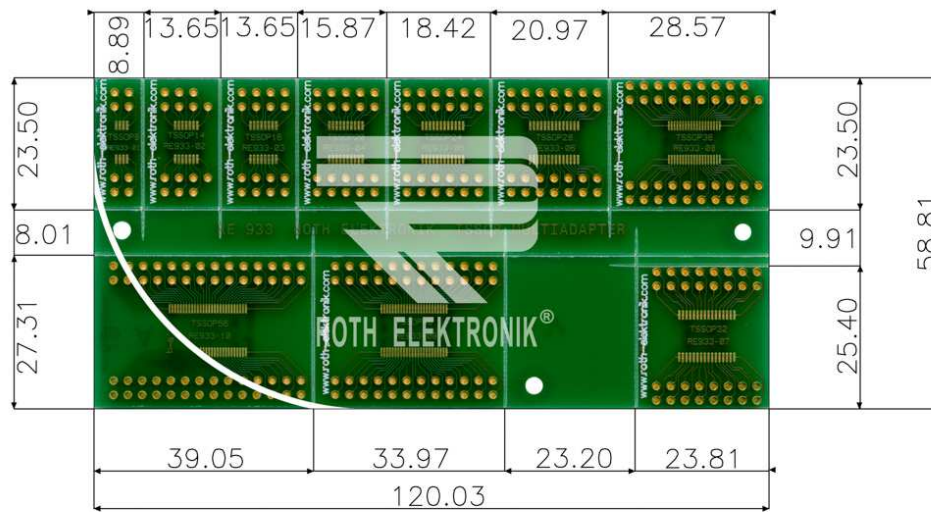

RE933

- Epoxy fibre-glass FR4 1.50 mm
- Double-sided 35 µm Cu
- Plated through holes (PTH)
- Surface chem. Ni/Au with solder stop mask
- Adaption circuit board for 10 different TSSOP's
- Pitch: 0.65 mm & 0.50 mm
- Hole diameter 1.00 mm
- Pre-scratched rated break point for the separation of individual modules from the board
- Size 58.90 x 120.10 mm

Module-No. Pitch mil Pin Size (mm)

RE933-01 0.650 mm 22.5 8 4.400 (173 mil) RE933-02 0.650 mm 22.5 14 4.400 (173 mil) RE933-03 0.650 mm 22.5 16 4.400 (173 mil) RE933-04 0.650 mm 22.5 20 4.400 (173 mil) RE933-05 0.650 mm 22.5 24 4.400 (173 mil) RE933-06 0.650 mm 22.5 28 4.400 (173 mil) RE933-07 0.650 mm 22.5 32 4.400 (173 mil) RE933-08 0.500 mm 19.6 38 6.100 (240 mil) RE933-09 0.500 mm 19.6 48 6.100 (240 mil) RE933-10 0.500 mm 19.6 56 6.100 (240 mil)