


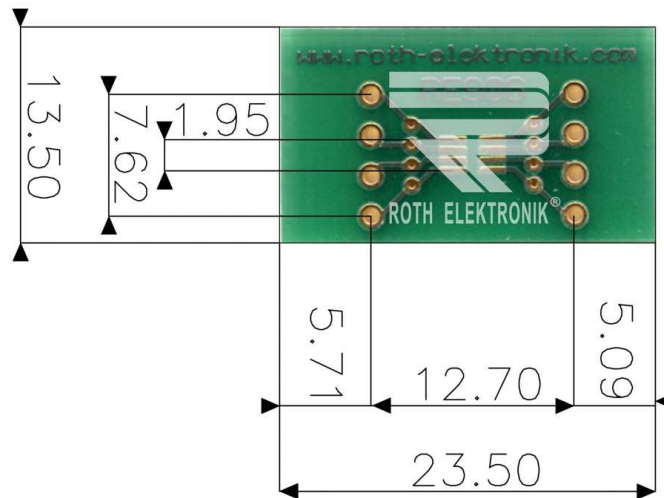

RE906

- Epoxy fibre-glass FR4 1.50 mm
- Double-sided 35 µm Cu
- Plated through holes (PTH)
- Surface chem. Ni/Au with solder stop mask
- Adaption circuit board with 2 x 4 soldering pads for SC70, SOT23 (pitch 0.65 mm)
- Suitable for 2.54 mm grid (hole dia 1.00 mm) and 1.27 mm grid (hole dia 0.30 mm)
- Size 13.50 x 23.50 mm

ver.20150130