

Switch Emergency Stop



Specifications:

External Depth	: 49.2mm
External Diameter	: 24mm
Lead Spacing	: 2.5mm
Panel Cutout Diameter	: 16mm
Panel Thickness Max.	: 5mm
Terminal Type	: PCB Pins


Electrical:

Maximum switching power	: 30V DC
Maximum switching voltage	: 32V DC
Maximum switching current	: 100mA DC
Dielectric strength (50Hz/1 minute)	: 750V between open contacts


Operating Life:

OA (momentary)	: $\geq 1 \times 10^5$ operations
EE (push-push)	: $\geq 1 \times 10^5$ operations
Contact resistance	: Initial $\geq 100m\Omega$; 50m Ω : After life 150m Ω
Insulation resistance	: $\geq 10^{10}\Omega$
Bounce time	: $\leq 3ms$

Plug-in Emergency Stop Switch

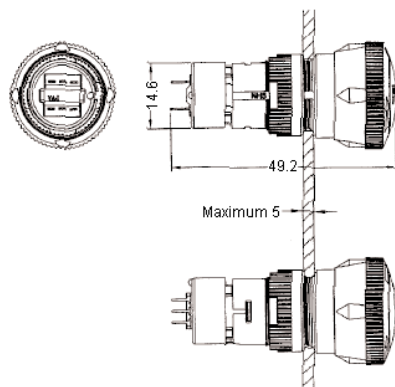

Hole Diameter

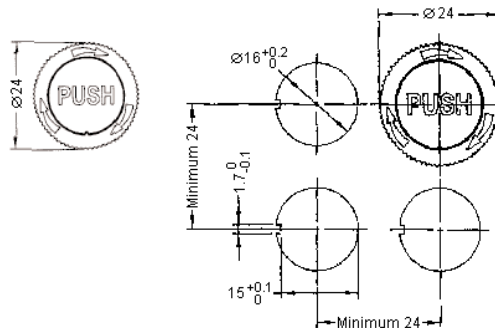

Dimensions : Millimetres

Part Number Table

Description	Part Number
Emergency Stop Switch - AC Switching	MCOS38009