

Keylock Switches



Features:


NS106-1, NS106-2 and NS106-M

- Zinc alloy keys, chrome plated with plastic cover
- Silver plated contacts and terminals
- 4 pins tumbler mechanism
- NS106 2 Positions (off-on) 2 terminals
- NS106 2 Positions (off-on) 4 terminals
- NS106M 2 Positions (off-on) 2 spring loaded for momentary contact



**RoHS
Compliant**

NS106-1, NS106-2 and NS106-M

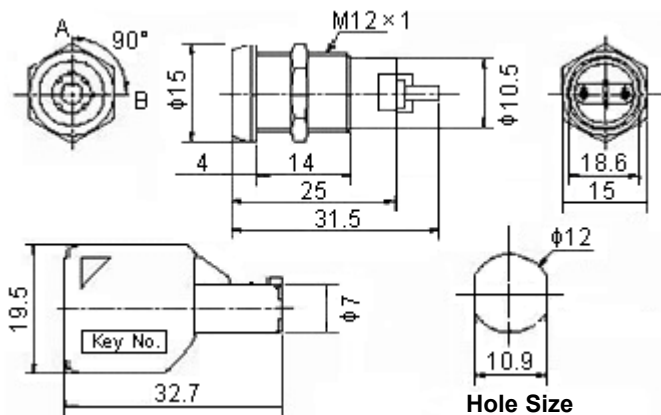

Dimensions: Millimetres

Specifications:

Contact rating	: 1 A at 125 V ac, 0.5 A at 250 V ac
Maximum contact resistance	: 10 mΩ
Insulation resistance	: 200 MΩ minute (500 V dc)
Dielectric strength	: 1,000 V ac at 1 minute
Combinations	: 200
Housing	: Zinc alloy die cast, chrome plated

Key-Pull Figures

- Off Position
- | Indicates Key-Pull
- Indicates No Key-Pull



Figure 1



Figure 2



Figure 3



Figure 4

Figure Number	Lock Number	Pole	Positions	Terminals	Key Pulls	Lum	↑	↓	Type
1	NS106-1	1	2	2	1	90	Off	On	SPSI
2	NS106-2				2				
1	NS106M				1				

Dimensions: Millimetres


Keylock Switches

S116-1


Features:

- Zinc alloy die cast housing and cylinder, chrome plated
- Zinc alloy keys, chrome plated.
- Silver plated contacts and terminals
- 2 positions (on-on) 4 terminals
- 150 Combinations available
- Rating: 1 A at 125 V ac, 0.5 A at 250 V ac

Dimensions

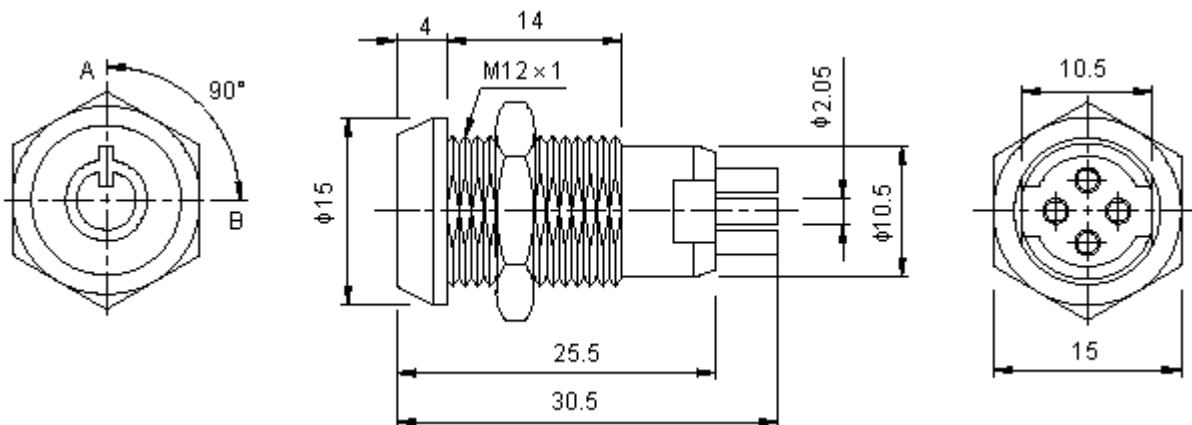

Dimensions: Millimetres

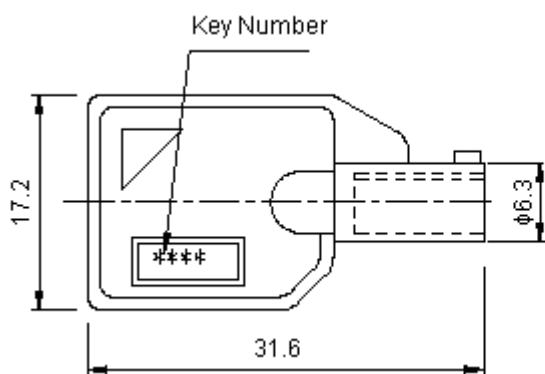

Recommended hole size

Dimensions: Millimetres


S116-2

Features:


- Zinc alloy die cast housing and cylinder, chrome plated
- Zinc alloy keys, chrome plated
- Silver plated contacts and terminals
- 2 positions (on-on) 4 terminals
- A O'clock position (1-3 on)
- B O'clock position (2-4 on)
- 150 combinations available
- Rating: 1 A at 125 V ac, 0.5 A at 250 V ac

Keylock Switches

Dimensions

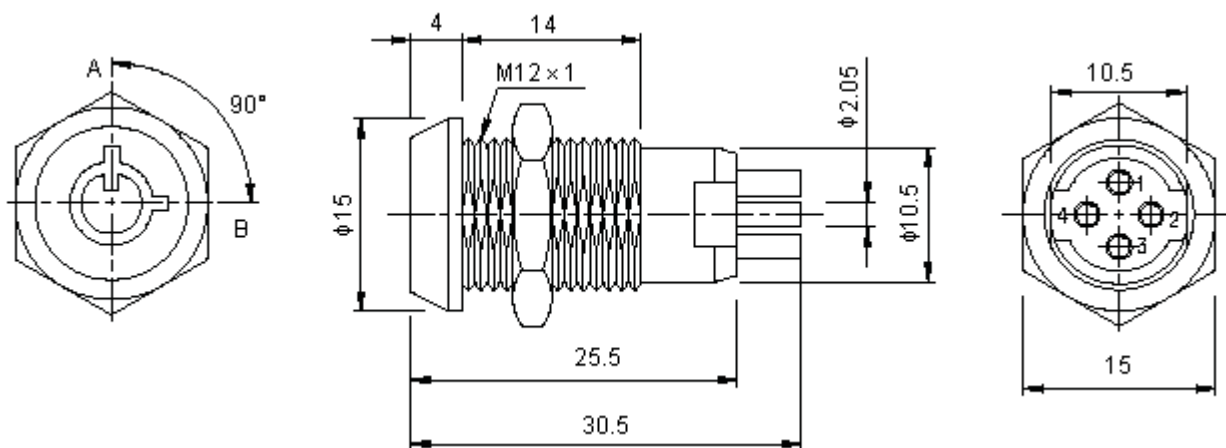

Dimensions: Millimetres

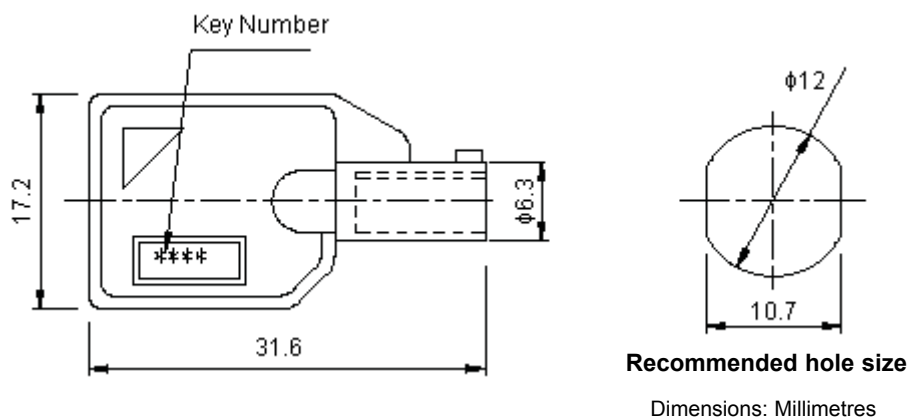

Recommended hole size

Dimensions: Millimetres

Part Number Table

Description	Part Number
Keyswitch, SPST, 2 Pos, RDM, 1 Keypull	NS106-1
Keyswitch, SPST, 2 Pos, RDM, 2 Keypull	NS106-2
Keyswitch, SPDT, 2 Pos, RDM, 1 Keypull	S116-1
Keyswitch, SPDT, 2 Pos, RDM, 2 Keypull	S116-2
Keyswitch, SPST, 2 Pos, MOM, RDM	NS106-M