

# Duratool Spacer



## Features:

- Material Designation : 101(+)(f1), 101F(+)(f1), 101L(+)(f1), E101(+)(f1), E101L(f1), 132F(+)(f1), 135F(+)(f1)
- Product Description : Polyamide 66 (PA66), designated "zytel" furnished as pallets
- Dielectric Strength : 13kV/mm
- Volume Resistivity : 14 (10<sup>k</sup> Ω-cm)
- CTI : 0
- HVTR : 0
- D495 : 6





Colour	Minimum Thickness (mm)	Flame Class	HWI	HAI	RTI Elec	RTI Imp	RTI Str	IEC GWIT	IEC GWFI
All	0.71	V-2	4	0	130	75	85	725	960
	1.5		3					750	
	3		2					800	
	6		-						

(+) Virgin and regrind up to 50% by weight inclusive, have the same basic material characteristics.

(f1) Suitable for outdoor use with respect to exposure to ultraviolet light and water exposure.



# Duratool Spacer

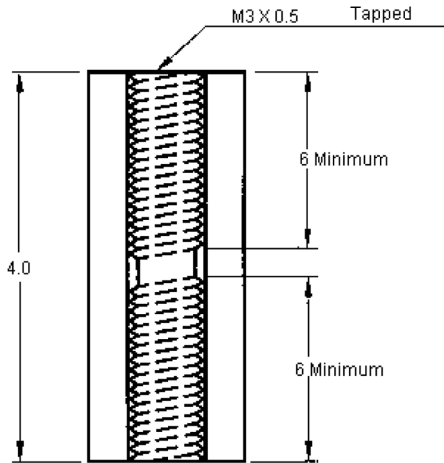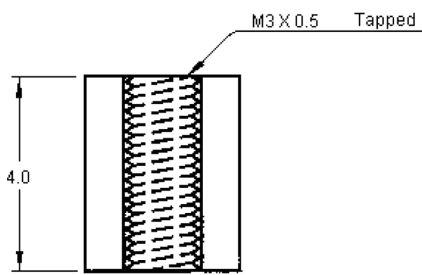

Dimensions : Millimetres

## Part Number Table

Description	Part Number
HEX Threaded Spacer, Nylon 6.6, Natural	D01486
	D01487
	D01488
	D01489
	D01490

