



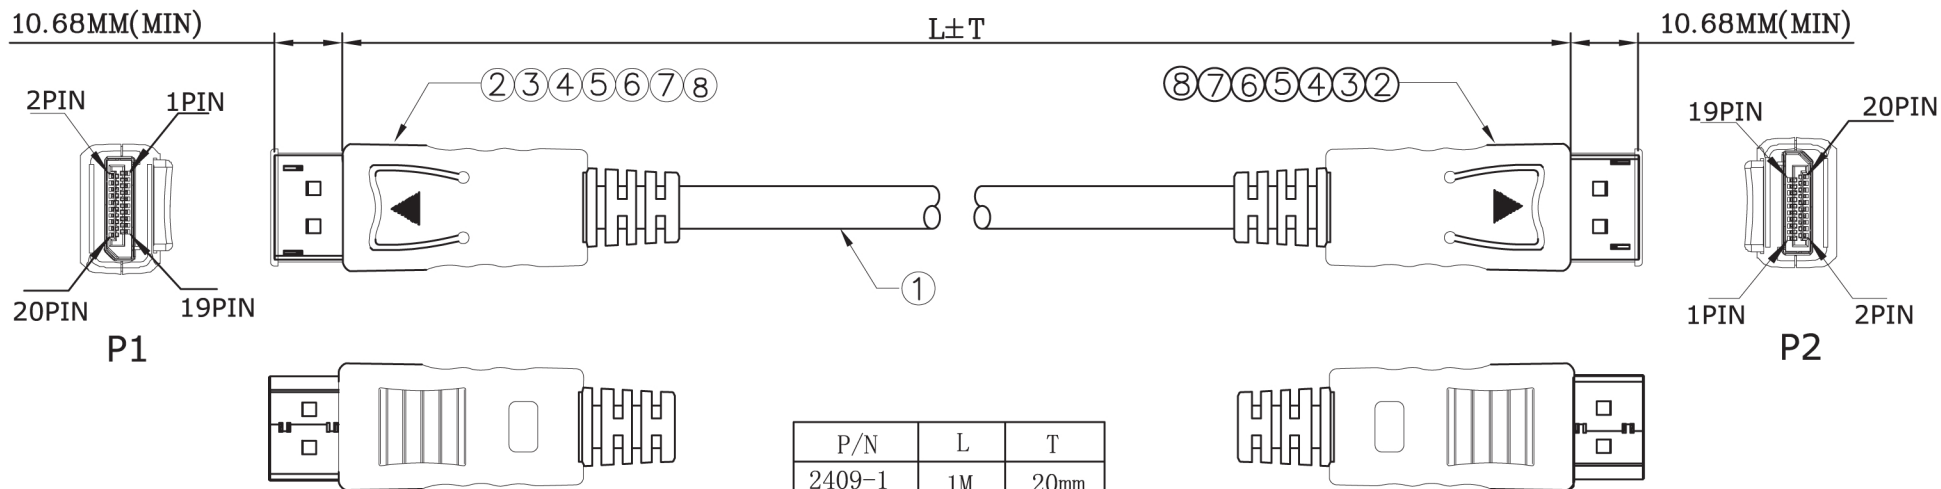

ELECTRICAL TEST:

- 1.100% OPEN & SHORT & MIS WIRE TEST
- 2.CONTACT RESISTANCE:3 OHM(MAX)
- 3.INSULATION RESISTANCE:10M OHM(MIN)
- 4.HI-POT TEST:DC 300V/10ms

PIN Assignment

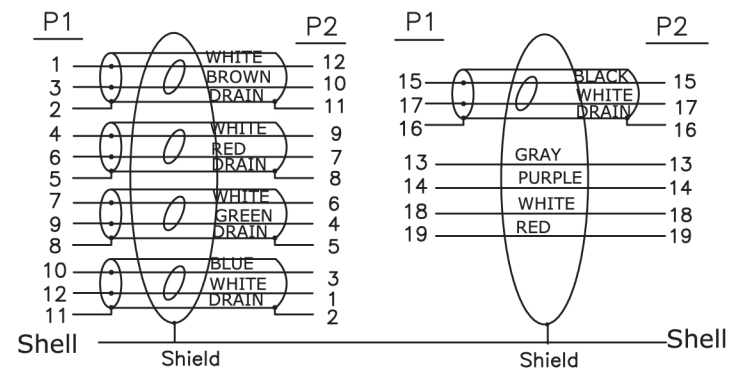

8	Inside Molding:LDPE	4	g
7	45P PVC COLOR: Black	10	g
6	H.S.T:Ø1.0*17mm	0.034	M
5	DisplayPort M Transparent Dust Cover	2	pcs
4	DisplayPort (DP01#) M Black ABS down Shell	2	pcs
3	DisplayPort M(DP01#) Black ABS UP Shell	2	pcs
2	DisplayPort Port M Black Insulation ,Gold-plated 3u Terminal ,Nickel PLATED Shell.	2	pcs
1	Display Por UL20276 (7/0.102TA*1PR+EAM)*5+7/0.102TA*5C+AEB(AL)85%OD:6.0MM Black	L	M
NO	DESCRIPTION	Q'TY	UNIT

TOLERANCE		
INCHES	M/M	
.X	.015	.30
.XX	.010	.10
.XXX	.005	.05
DRAWN BY	KNOW	
CHECK BY		
APPD BY		

