



Datenblatt - Fiche technique - Data sheet

11.02.9000




ROLINE USB 3.1 Kabel, C-C, ST/ST, 0,5m

ROLINE Câble USB 3.1, C-C, M/M, 0,5m

ROLINE USB 3.1 Cable, C-C, M/M, 0.5 m

Customer P/N: XXXXXXXXXXXX RXX

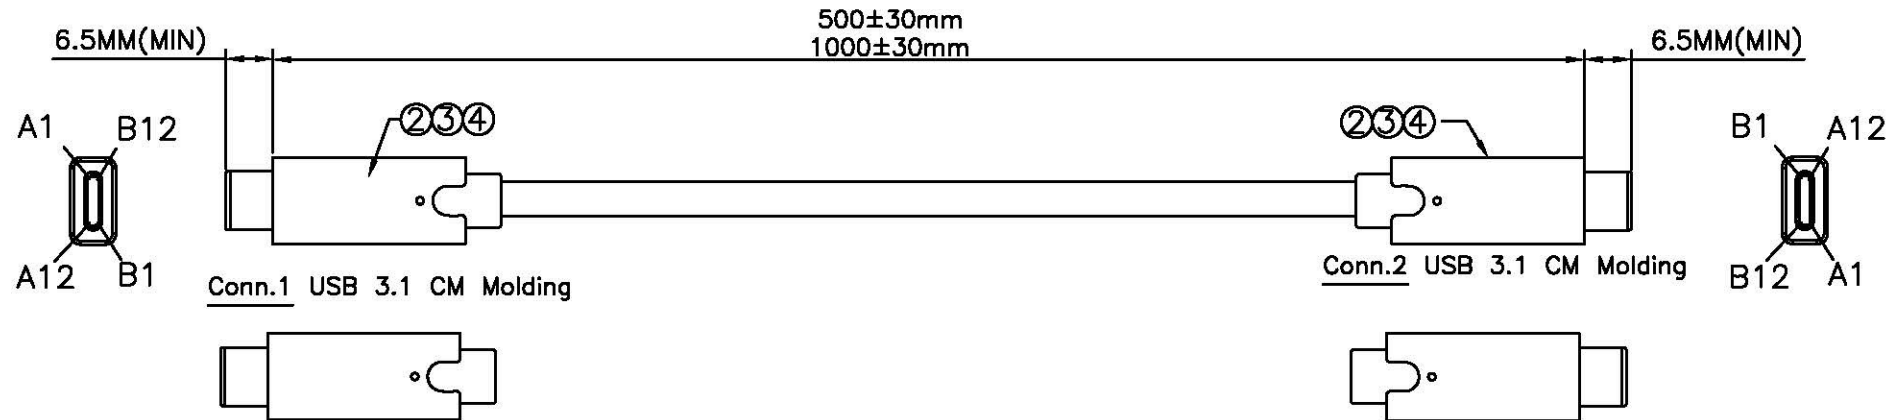


Electrical Test:

1. 100%Test(Open, short ,miss wire)
2. Contact Resistance: 2 ohm max.
3. Insulation Resistance: 5M ohm min.
4. Hi-pot:300V DC/10ms

NOTE:

1. Super High Speed USB 3.1 Cable (32AWG*1P+D+AL+MY)*4C+32AWG*1P+32AWG*3C +22AWGT*2C+F+AB OD:4.5±0.2mm Color: Black
- 2.USB3.1 (C) M Solder Type Shell Nickel, Black Insulation,
- 3.INSIDE MOLDING:PE
- 4.OUTSIDE MOLDING:Black PVC

Pin Assignment

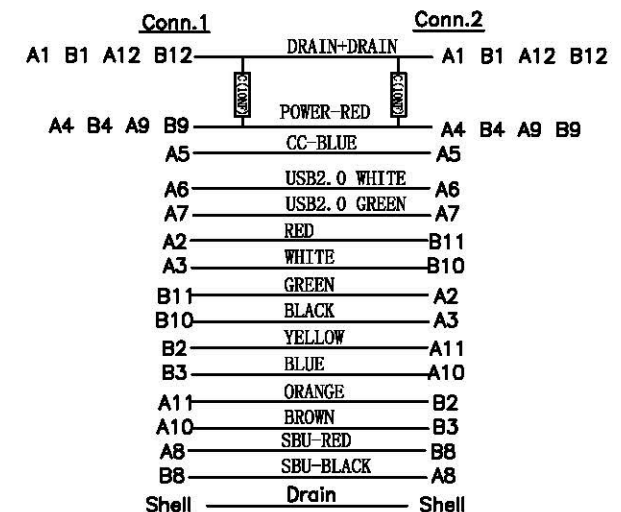

REV.	DATE	CONTENTS OF CHANGE	DESIGNER	TOL ±	Pld	Met	Ins	Por	Cab	Pod	Gas	DIS	APPROVAL	CHECK	DRAWING	DESIGN	DRAWING NAME	USB3.1 C TO C		
△				RANGE													DATE	PART NO.	11.02.9000A & 9001A	R00
△				0~6	0.1	0.1	0.1	0.2	0.5	1	0.5	0.2					2015-07-29			
△				6~30	0.1	0.1	.15	.25	1	1	0.5	.25								
△				30~80	0.1	.15	0.2	0.3	2	1.5	1	0.3								
△				80~180	.15	.15	.25	0.3	2	2	1	.45								
△				180~315	.15	0.2	0.3	0.4	2.5	2	1	0.6								
△				315~800	0.2	0.3	0.4	0.5	3	3	2	1.1								

SECOMP

SCALE 1:1 UNIT MM