


# Peltier Cooler

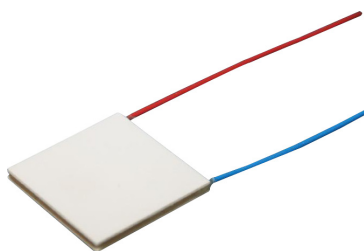

## Specification:

Parameters		Remarks
Internal Resistance	1.05Ω ±10%	Note-1
I Max.	6A	Note-2
V Max.	8.8V	Note-3
-	Th = 27°C    Th = 50°C	-
Q Max.	27.9W    32.7W	Note-4
ΔT Max.	70°C    77°C	Note-5
Solder melting point	235°C	Note-6
Max. compress	1MPa	Note-7
Operating Temperature	-40°C to +100°C	
External Depth	3.1mm	
External Length / Height	20mm	

Note-1 Measured by AC 4-terminal method at 25°C

Note-2 Max. current at T Max.

Note-3 Max. voltage at T Max.

Note-4 Max. cooling capacity at I max., V max. and ΔT = 0°C

Note-5 Max. temperature difference at I max., V max. and Q = 0 W  
(Max. parameters are measured in a vacuum 1.3 P)

Note-6 The solder melting point of thermoelectric module

Note-7 Recommended max. compression (not destruction limit)

## Recommendations:

Dropping or exerting mechanical shock will cause breakage, take care in handling

Thinly spread thermally conductive grease should be placed between module and heat exchanger

Surface deviation from flatness should be kept under 0.02 mm

For optimum reliability and performance it is recommended that the module be utilised < 0.7 I max


## Specification Table:

T<sub>hot</sub> = 27°C

I max. (A)	U max. (V)	Qc max. W	dT max. °C
6	8.8	29.7	70

# Peltier Cooler

## Outline Drawing

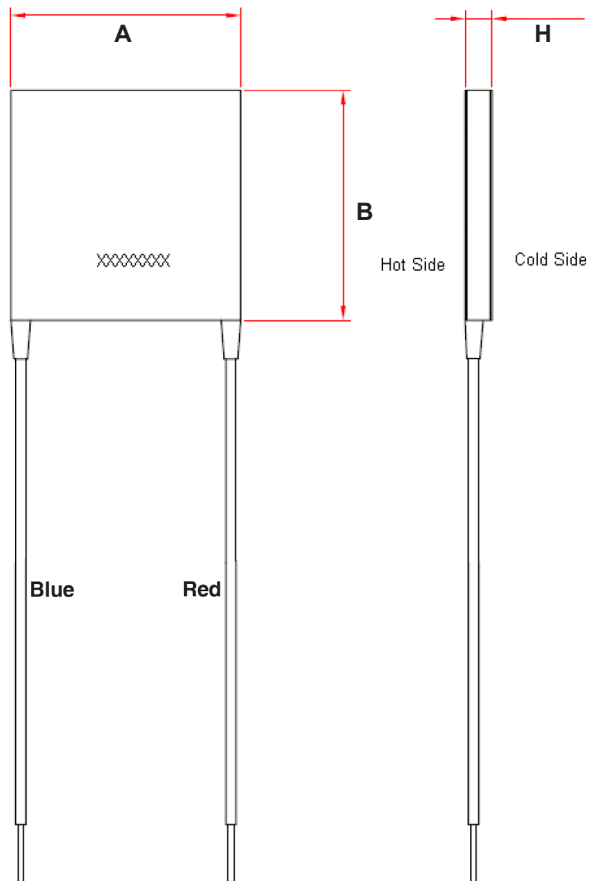

Dimensions Table

A	B	H
20mm	20mm	3.1mm

Part Number Table

Description	Part Number
Peltier Cooler, 29.7W	MCPE1-07106NC-S