


Thermoelectric Module

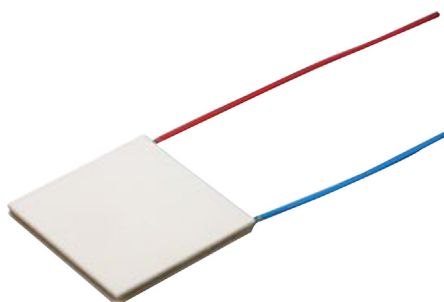

Description:

This specification is applied to multicomp thermoelectric modules
Revision of these specifications is carried out after consent

Specifications:

Parameters			Remarks
Internal resistance	0.8 Ω \pm 10%		Note-1
I max.	15 A		Note-2
V max.	15.4 V		Note-3
-	Th = 27°C	Th = 50°C	-
Q max.	130 W	145 W	Note-4
Δ T max.	68°C	75°C	Note-5
Solder melting point	138°C		Note-6
Maximum Compress	98.07 N / cm ² (10 kgf / cm ²)		Note-7

Note-1 : Measured by AC 4 - terminal method at 25°C

Note-2 : Maximum current at Δ T max.

Note-3 : Maximum voltage at Δ T max.

Note-4 : Maximum cooling capacity at I max. V max. and Δ T = 0°C

Note-5 : Maximum temperature difference at I max. V max. and Q = 0 W
(Maximum parameters are measured in a vacuum 1.3 P)

Note-6 : The solder melting point of thermoelectric module

Note-7 : Recommended maximum compression (not destruction limit)

Recommendations:

Operating range : -40°C to +90°C

Dropping or exerting mechanical shock will cause breakage, take care in handling

Thinly spread thermally conductive grease should be placed between module and heat exchanger

Surface deviation from flatness should be kept under 0.02 mm

For optimum reliability and performance it is recommended that the module be utilised < 0.7 I max.

Silicone sealed for moisture protection

Specification Table

Thot = 27°C

I max. (A)	U max. (V)	Qc max. W	dT max. °C	A	B	H
15	15.4	130	68	50	50	3.5


Dimensions : Millimetres



Thermoelectric Module



Outline Drawing:

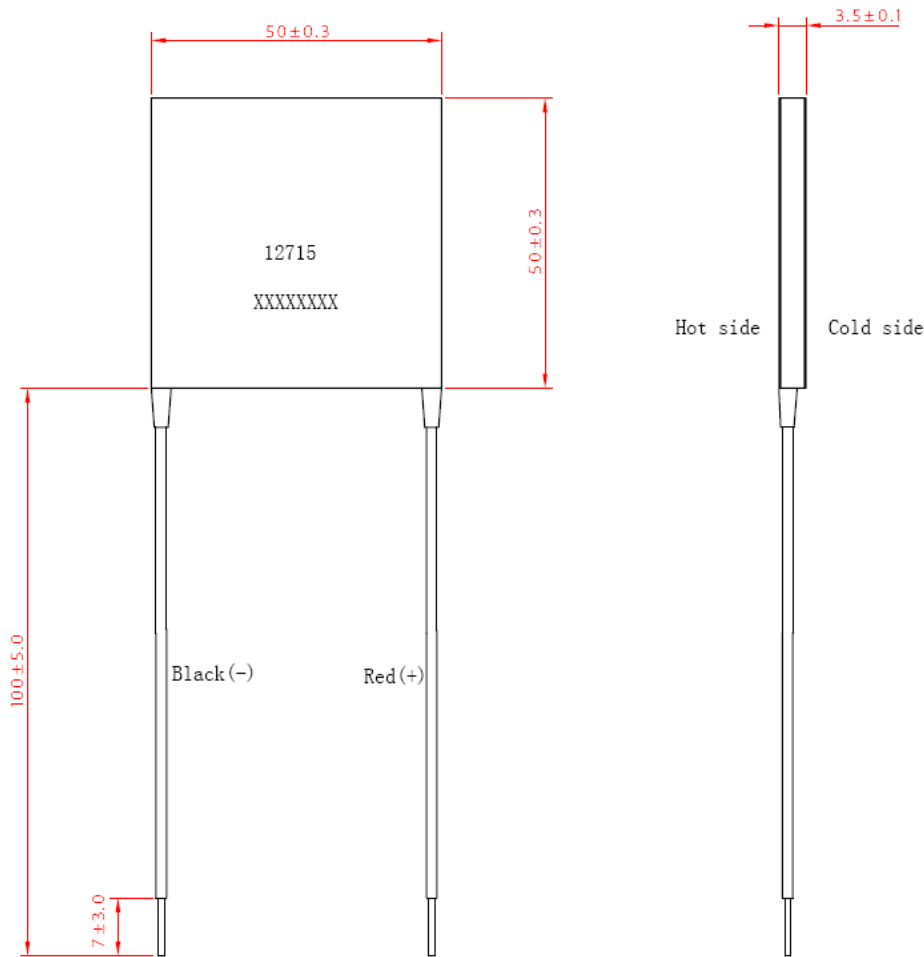

Dimensions : Millimetres

Part Number Table

Description	Part Number
Peltier Cooler, 130W	MCTE1-12715L-S

