


Peltier Cooler - 121W

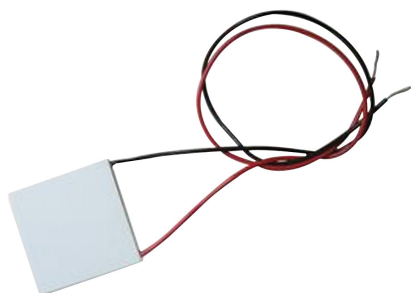

Features:

Transducer Function: Thermoelectric modules

Specifications:

Parameters		Remarks
Internal resistance	$2.4\Omega \pm 10\%$	Note-1
I _{max.}	8.5A	Note-2
V _{max.}	24.6V	Note-3
	Th=27°C	
Q _{max.}	121W	Note-4
ΔT _{max.}	71°C	Note-5
Solder Melting Point	138°C	Note-6
Max. Compress	1MPa	Note-7
Operating Temperature	-90°C to +100°C	
External Depth	3.8mm	
External Length / Height	40mm	

Note-1 Measured by AC 4-terminal method at 25°C

Note-2 Max. current at ΔT_{max}

Note-3 Max. voltage at ΔT_{max}

Note-4 Max. cooling capacity at I_{max.}, V_{max.} and ΔT=0°C

Note-5 Max. temperature difference at I_{max.}, V_{max.} and Q=0W
(Max. parameters are measured in a vacuum 1.3P)

Note-6 The solder melting point of thermoelectric module


Note-7 Recommended Max. compression (not destruction limit)

Recommendations:


- High cooling capacity from a small surface and long lifetime in power cycling applications with change of current polarity
- With operation current close to 0.5 I_{max} extremely high COP (coefficient of performance possible)
- Preferable application; high cooling capacity at high temperatures / cycling

Peltier Cooler - 121W

Performance Graph (298K)

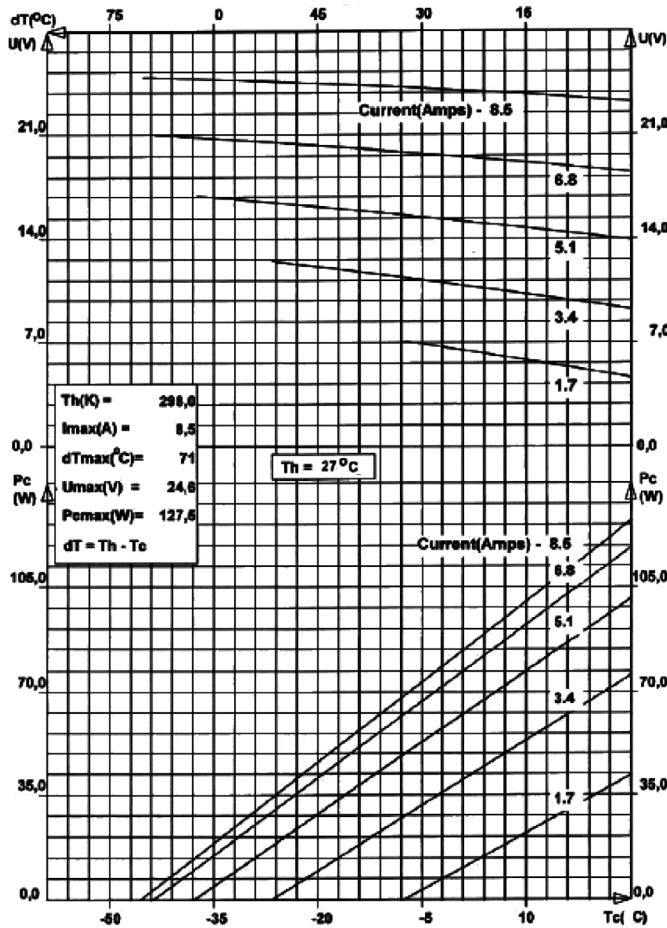


Performance Graph (323K)

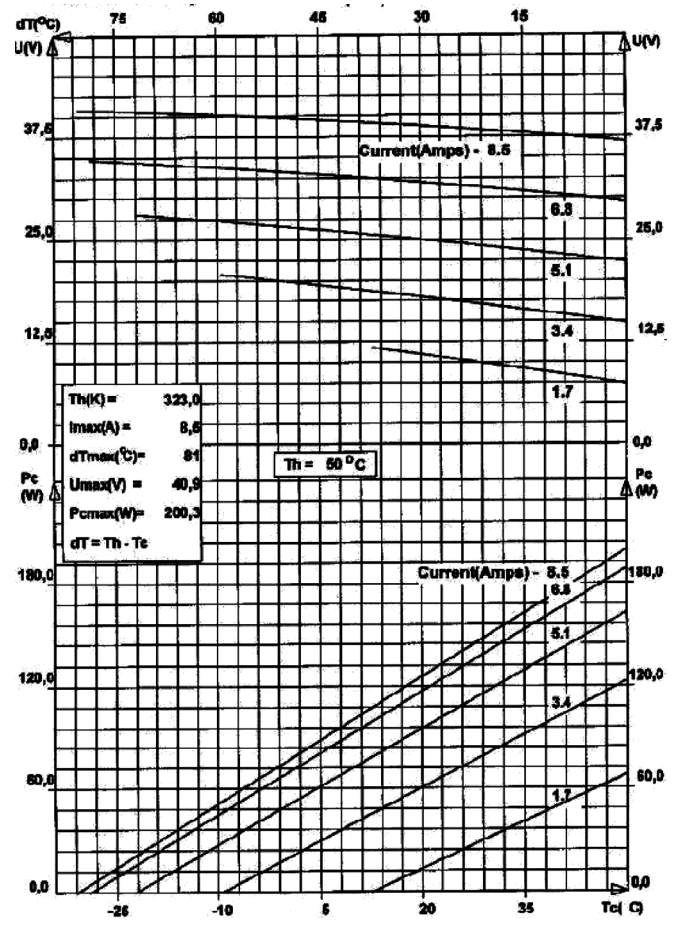

Peltier Cooler - 121W

Outline Drawing

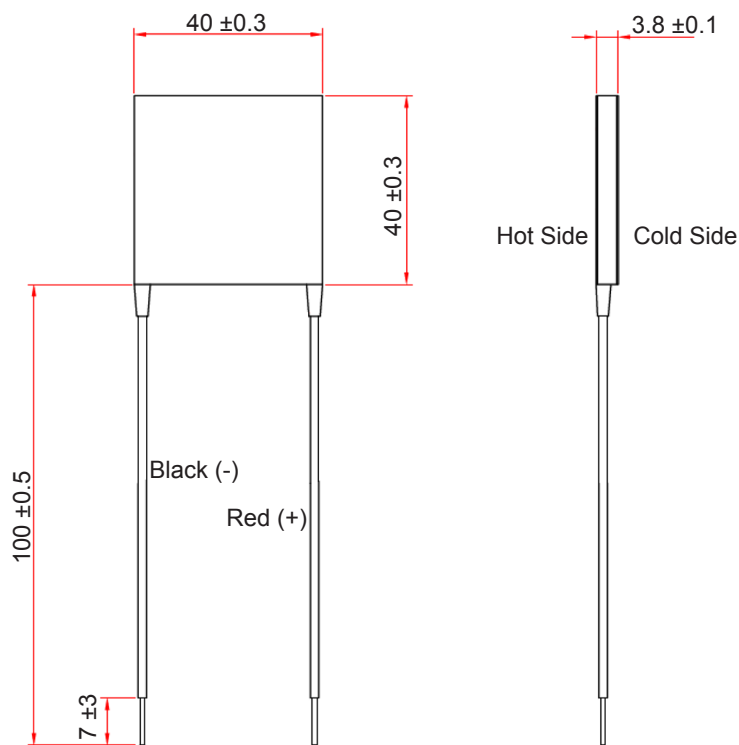

Dimensions : Millimetres

Part Number Table

Description	Part Number
Peltier Cooler, 121W	MCHPE-200-14-11-E