


Peltier Cooler - 222W

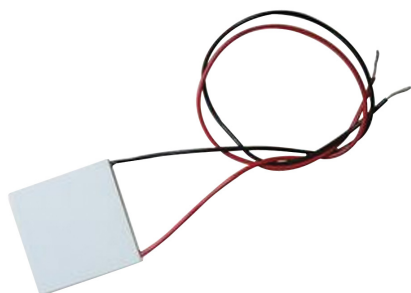

Features:

Transducer Function: Thermoelectric modules

Specifications:

Parameters		Remarks
Internal resistance		Note-1
I _{max} .	15.4A	Note-2
V _{max} .	24.8V	Note-3
	Th=25°C	Th=50°C
Q _{max} .	232W	249.4
ΔT _{max} .	68°C	78
Solder Melting Point	138°C	
Max. Compress	1MPa	
External Depth	3.7mm	
External Length / Height	40mm	

Note-1 Measured by AC 4-terminal method at 25°C

Note-2 Max. current at ΔT_{max}

Note-3 Max. voltage at ΔT_{max}

Note-4 Max. cooling capacity at I_{max}., V_{max}. and ΔT=0°C

Note-5 Max. temperature difference at I_{max}., V_{max}. and Q=0W
(Max. parameters are measured in a vacuum 1.3P)

Note-6 The solder melting point of thermoelectric module


Note-7 Recommended Max. compression (not destruction limit)

Recommendations:

- High cooling capacity from a small surface and long lifetime in power cycling applications with change of current polarity
- Operation temperature up to 90°C for long lifetime
- With operation current close to 0.5 I_{max} extremely high COP (coefficient of performance possible)


Peltier Cooler - 222W

2-3 Performance Graph (298K)

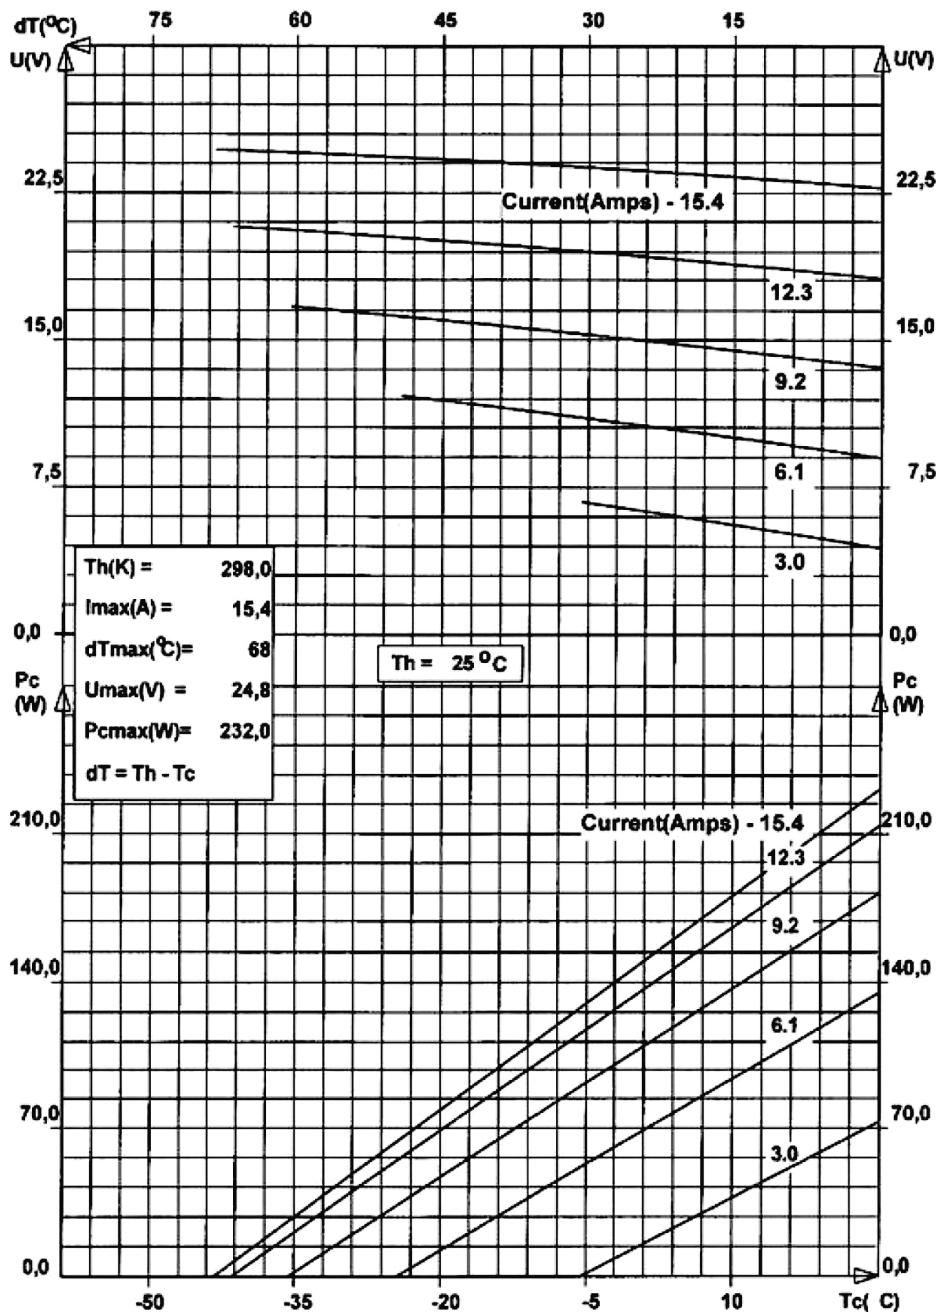

Peltier Cooler - 222W

2-3 Performance Graph (323K)

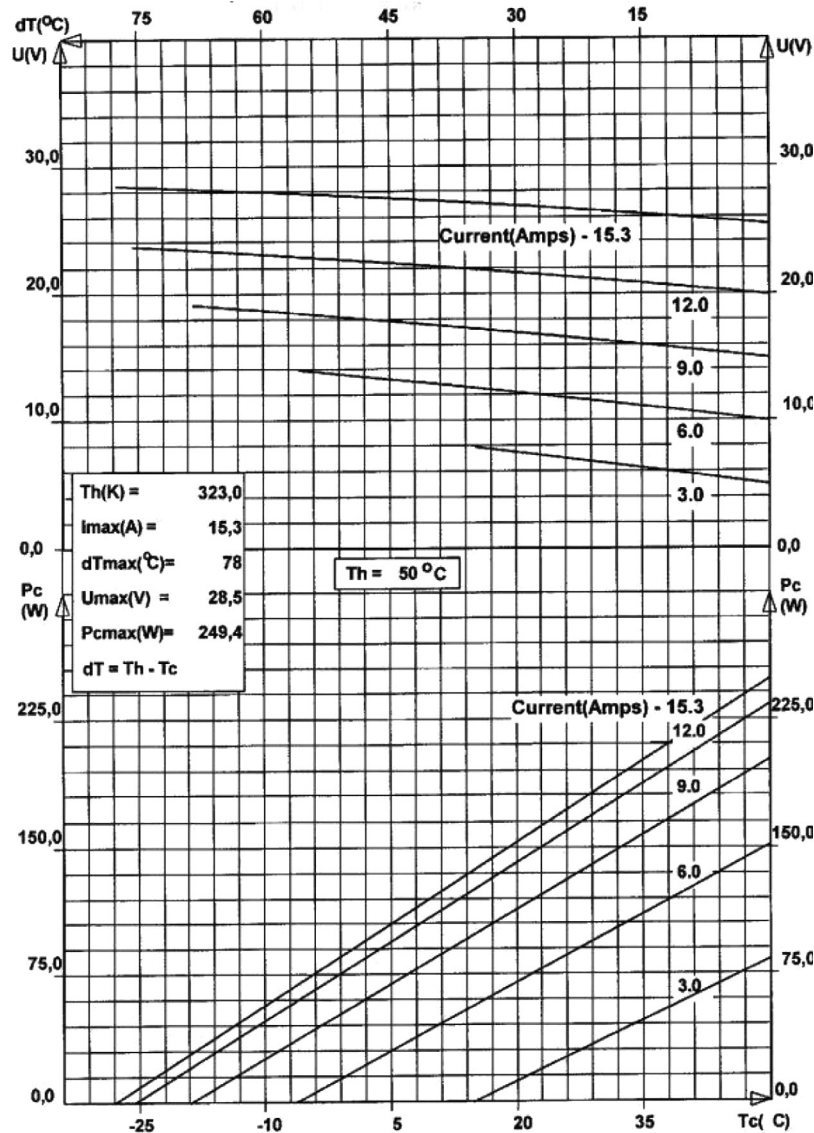

Part Number Table

Description	Part Number
Peltier Cooler, 222W	MCPE-200-14-06-E