


D-Sub Plug



High Density, 15Ways

**RoHS
Compliant**


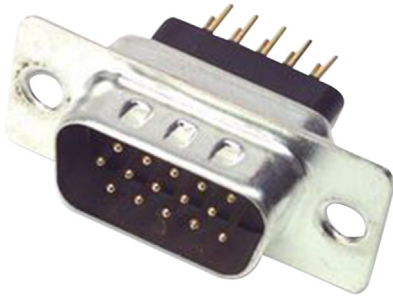


Specifications:

Shell	: Steel, Tin Plated
Insulator	: PBT + 30% Fibre Glass, Black
Contact	: Brass, Machined-pin Gold Plated Over Nickel
Current Rating	: 5A
Max. Contact Resistance	: 15mΩ
Min. Insulation Resistance	: 1,000MΩ
Voltage	: 500V AC for 1 minute
Temperature	: -50°C to +100°C
No. of Contacts	: 15

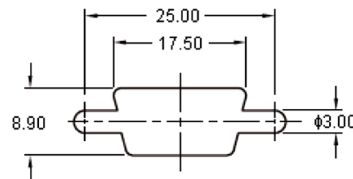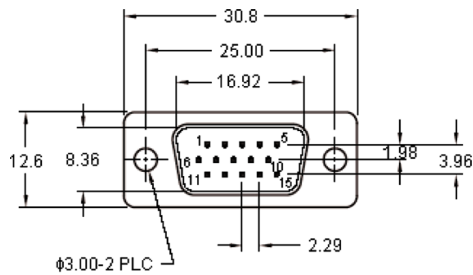

Panel Cutout

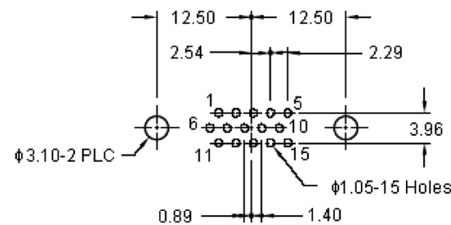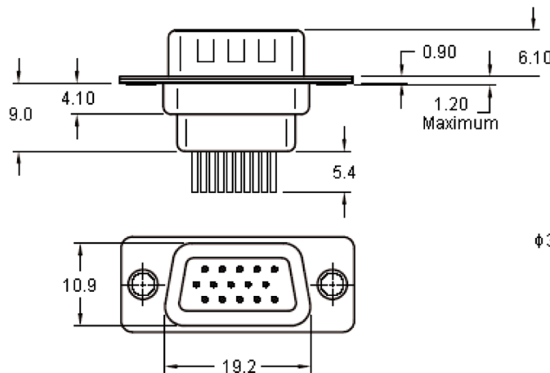

PCB Layout

Dimensions : Millimetres

Part Number Table

Description	Part Number
High Density D-Sub Plug, 15Way	SPC15402