




High Density D-Sub 78Pin Female DIP PCB Type Connector



**RoHS
Compliant**

Specifications:

Shell	: Steel, Tin Plated
Insulator	: PBT + 30% Fibre Glass, Black
Contact	: Brass, Stamped-Pin, Gold-Plated
Current Rating	: 5 Amps
Contact Resistance	: 15mΩ Max.
Insulation Resistance	: 1,000MΩ Min.
Voltage	: 500V AC for 1 minute
Temperature	: -50°C to +100°C

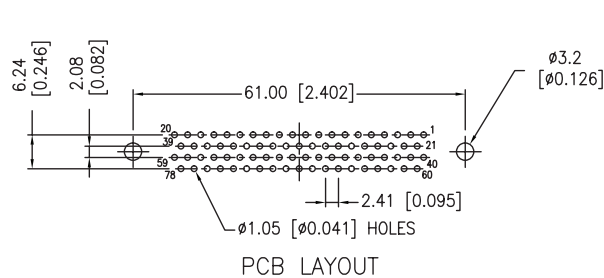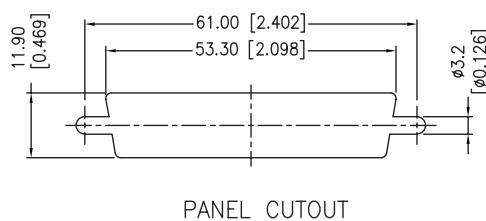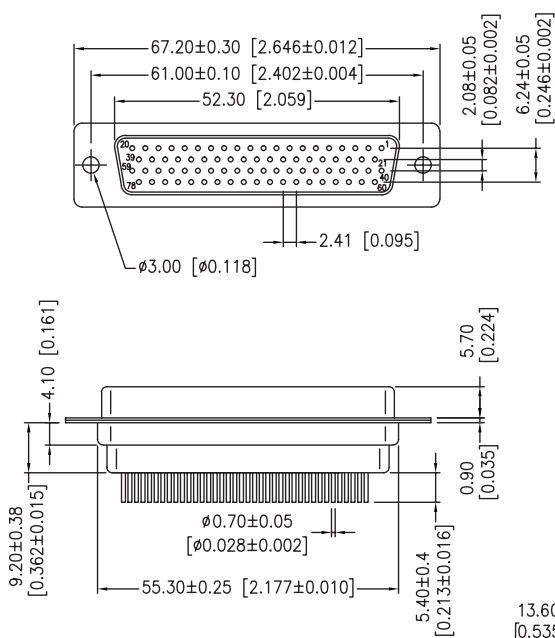

Dimensions : Millimetres (Inches)

Part Number Table

Description	Part Number
High Density D-Sub 78Pin Female DIP PCB Type Connector	SPC15351

