



D Sub Connector

Standard, 25Pos, Receptacle





Specifications

Connector Type	: D-Sub
No. of Contacts	: 25
D Sub Shell Size	: DB
Contact Termination	: Crimp
Shell	: Steel, Tin-Plate
Insulator	: Glass Filled-Nylon, Black
Current Rating	: 5 Amps
Insulator Resistance	: 1,000MΩ Min. at 500V AC
Temperature	: -50°C to +105°C
Dielectric Strength	: 1000V for One Minute

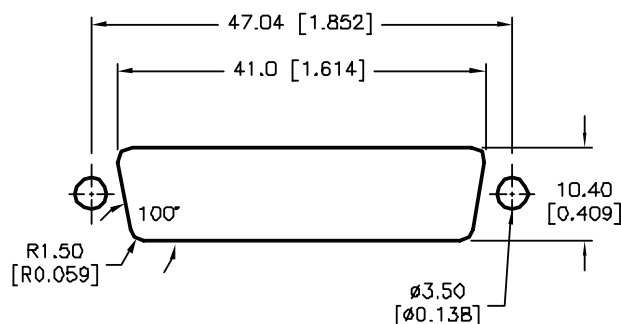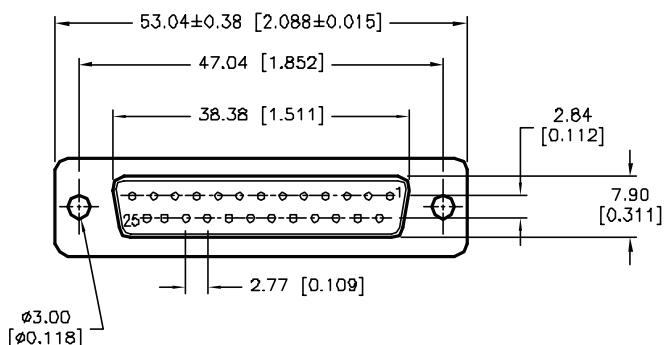


Panel Cutout

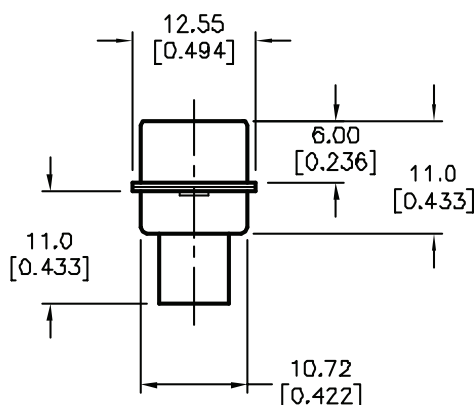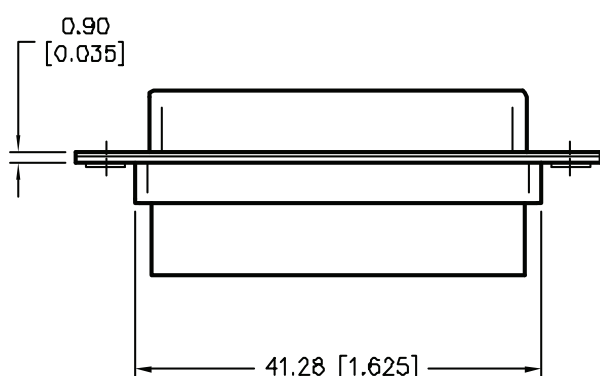

Dimensions : Millimeters (Inches)



D Sub Connector

Standard, 25Pos, Receptacle

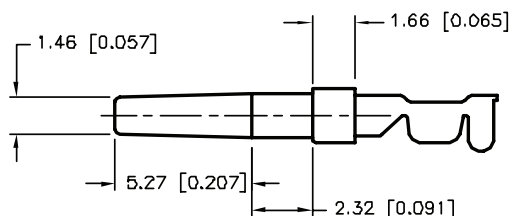


Specifications

Contact : Brass, Stamped 5μ" Gold-Plated on Contact Area,
Gold Flash on Crimp Area

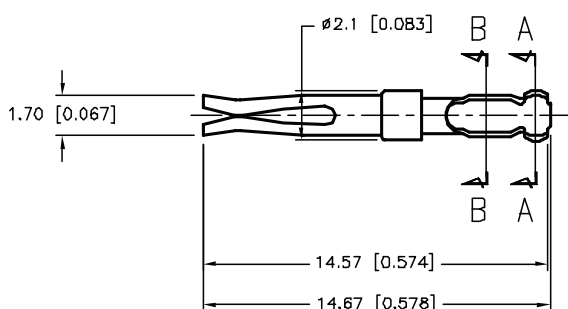

Section B-B



Section A-A

Dimensions : Millimeters (Inches)

Part Number Table

Description	Part Number
25 Pin Crimp Type D-Sub Socket	SPC15404