





D-Sub Connector

High-Density, 26 Pin




Specifications:

Shell	: Steel, Nickel-Plated over Copper
Insulator	: PBT + 30% Fiber-Glass, Black Colour
Contact	: Copper Alloy, Gold-Plated on Contact Area Tin Plated on Dip Solder Tail
Rivet	: Metal, Nickel-Plated
Board-Lock	: Brass, Tin-Plated
Jack-Screw	: Brass, Nickel-Plate
Current Rating	: 2 Amps
Insulator Resistance	: 5,000MΩ Min. at 500V DC
Dielectric Withstanding Voltage	: 1,000V AC Min. for One Minute
Contact Resistance	: 20m Max.
Working Temperature	: -55°C ~ +105°C

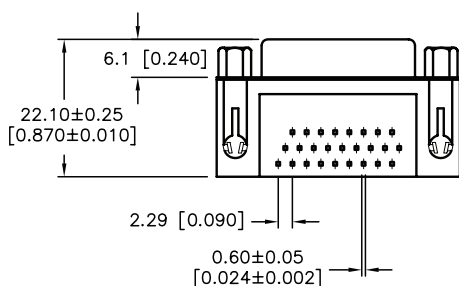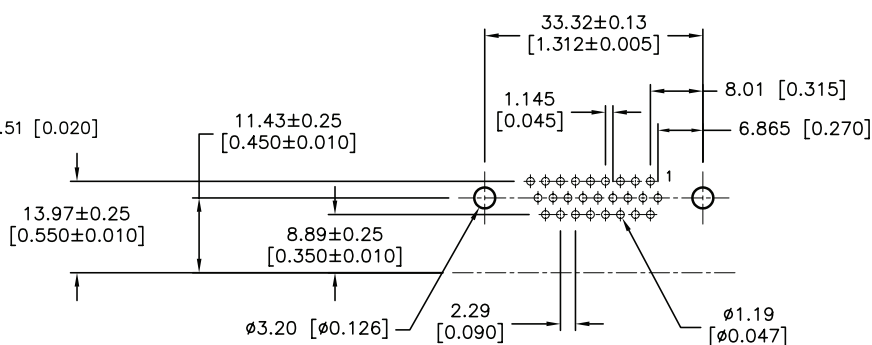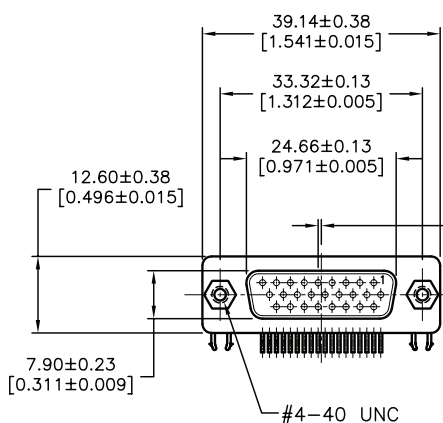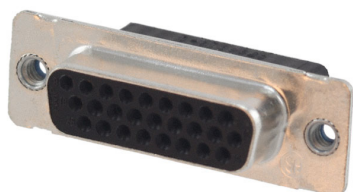

Dimensions : Millimeters (Inches)

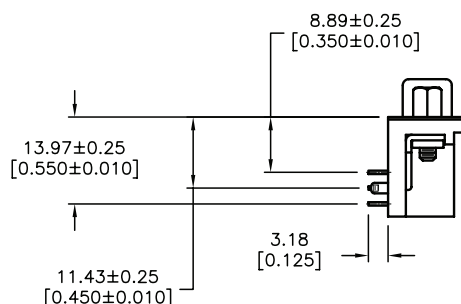

P.C.B. Layout

Part Number Table

Description	Part Number
D-Sub, High-Density, R/A PCB Socket, 26 Pin	SPC15293