


D-Sub Plug


Right Angle, 44Way

**RoHS
Compliant**

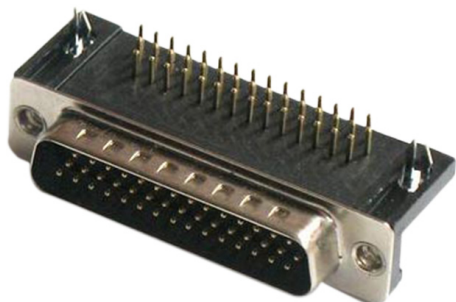

Specifications:

Shell	: Steel, Nickel-Plated Over Copper
Insulator	: PBT + 30% Fibre Glass, Black Colour
Contact	: Brass, Gold-Flash Over Nickel
Board-Lock	: Brass, Tin-Plated
Rivet	: Metal, Nickel-Plated
Jack-Screw	: Brass, Nickel-Plated
Current Rating	: 5A
Max. Contact Resistance	: 15mΩ
Min. Insulation Resistance	: 1,000MΩ at 500V DC
Voltage	: 500V AC for 1 minute
Working Temperature	: -55°C to +105°C
No. of Contacts	: 44
Gender	: Plug

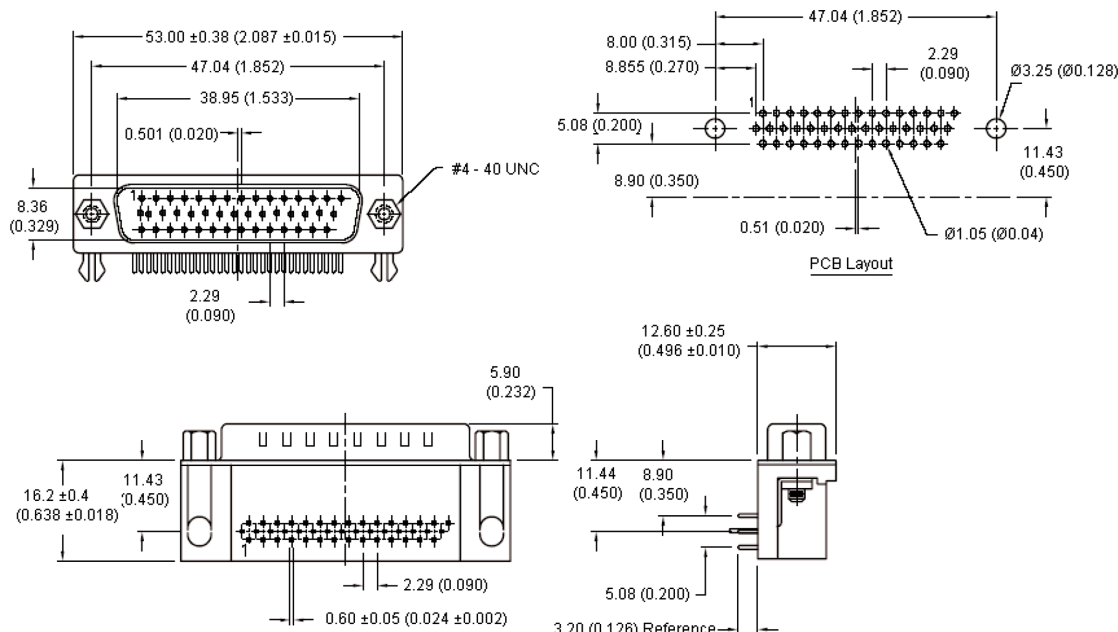

Dimensions : Millimetres (Inches)

Part Number Table

Description	Part Number
High Density D-Sub Plug, 44Way	SPC15140