

D-Sub Socket





Right Angle, PCB, 44Way

**RoHS
Compliant**



Specifications:

Shell	: Steel, Nickel-Plated Over Copper
Insulator	: PBT + 30% Fibre Glass, Black Colour
Contact	: Copper Alloy, Gold-Plated on Contact Area Tin-Plated on Dip Solder Tail
Rivet	: Metal, Nickel-Plated
Board-Lock	: Brass, Tin-Plated
Jack-Screw	: Brass, Nickel-Plated
Current Rating	: 2A
Min. Insulation Resistance	: 5,000MΩ at 500V DC
Min. Dielectric Withstanding Voltage	: 1,000V AC for 1 minute
Max. Contact Resistance	: 20mΩ
Working Temperature	: -55°C to +105°C
No. of Contacts	: 44
Gender	: Receptacle

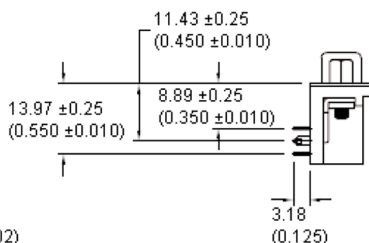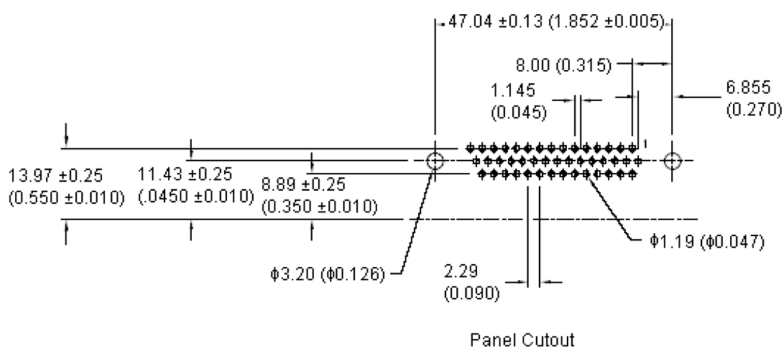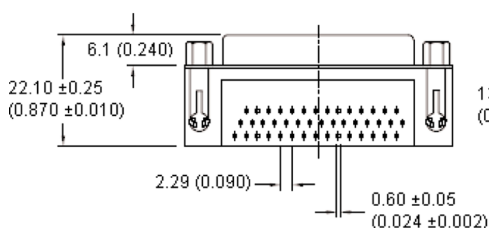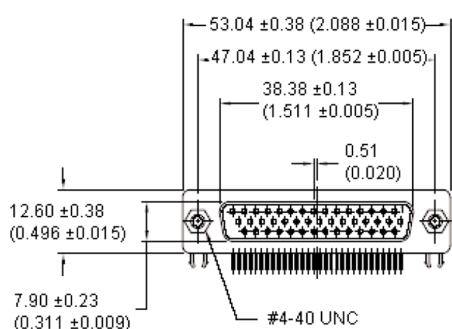

Dimensions : Millimetres (Inches)

Part Number Table

Description	Part Number
High Density D-Sub Socket, 44Way	SPC15324