





5mm Screw PCB Terminal Modular



Specifications:

Rating Current	: 16A, 300V AC
Min. Insulation withstand Voltage	: 2,000V AC
Insulation Resistance	: >2,000 MΩ 500V DC
Operating Temperature	: -40°C to +105°C
Wire Strip Length	: 4 to 5 mm
Wire Range	: 12 to 26 AWG
Screw Torque	: 7 lb-inch
UL Rating	: UL94-V0

**RoHS
Compliant**

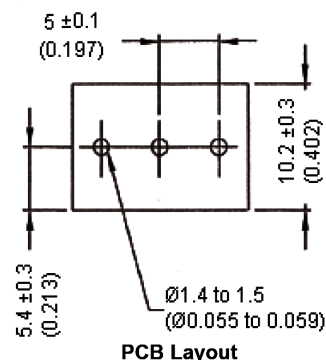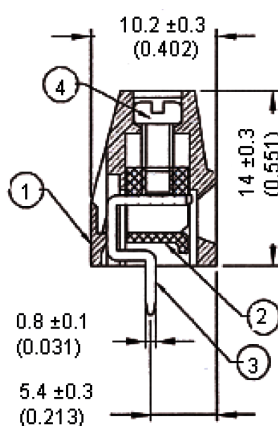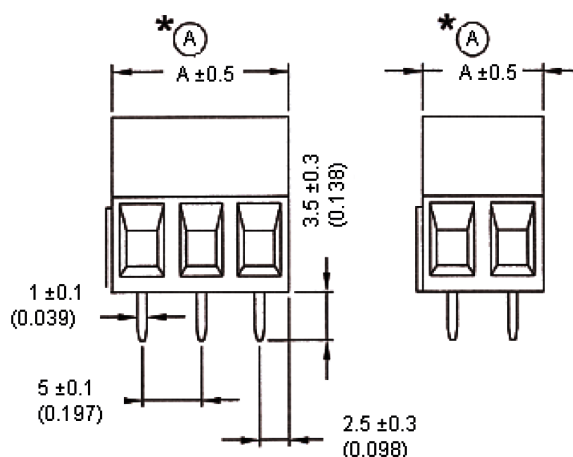

Dimensions : Millimetres (Inches)

Specification Table

No	Material		Plating / Finish	Remark
1	Insulating body	Polyamide 66	-	Green
2	Cage clamp	Steel	Ni plated	-
3	Terminal	Brass	Tin plated	-
4	Screw	Steel	Ni plated	-

Part Number Table

Description	*A mm (Inches)	Part Number
Terminal Black PCB 5mm Modular 02 Way	10 (0.394)	MC000046
Terminal Black PCB 5mm Modular 03 Way	15 (0.591)	MC000047

