


Terminal Block

5.08mm Pitch

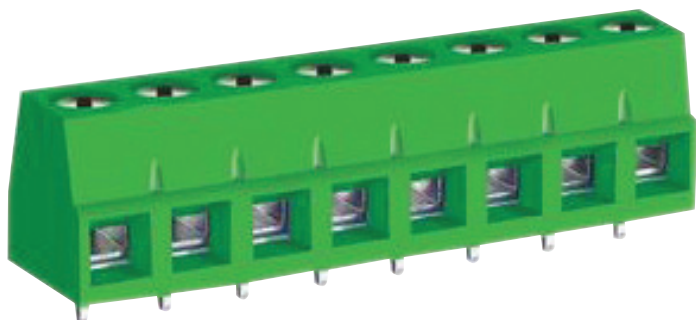

Specifications

	CUL	VDE
Rated Voltage	AC 300V	AC 250V
Rated Current	16A	16A
Wire Size	26 AWG to 12 AWG	0.2mm to 4mm ²
Housing Material	Polyamide66	
Cage Clamp	Steel, Ni Plated	
Terminal	Brass, Tin Plated	
Screw Size	M2.6, Steel, Ni Plated	
Operating Temperature	-40°C to +105°C	
Torque	7.0 lb-inch	
PCB Hole Diameter	Φ 1.5mm	

Part Number Table

Description	Dimensions		Part Number
Terminal BLK PCB 5.08mm Screw 02 Way	10.2mm	0.4inch	MC000034
Terminal BLK PCB 5.08mm Screw 03 Way	15.3mm	0.6inch	MC000035
Terminal BLK PCB 5.08mm Screw 04 Way	20.3mm	0.8inch	MC000036
Terminal BLK PCB 5.08mm Screw 05 Way	25.4mm	1inch	MC000037
Terminal BLK PCB 5.08mm Screw 06 Way	30.5mm	1.2inch	MC000038
Terminal BLK PCB 5.08mm Screw 08 Way	40.6mm	1.6inch	MC000039
Terminal BLK PCB 5.08mm Screw 10 Way	50.8mm	2inch	MC000040
Terminal BLK PCB 5.08mm Screw 12 Way	61mm	2.4inch	MC000041

