

Terminal Block

4Way, 10A




Specifications:

Current Rating	: 10A (300V AC)
Minimum Withstanding Insulation Voltage	: 2,000V AC
Insulation Resistance	: > 2,000MW (500V DC)
Operating Temperature	: -40°C to +105°C
Wire Range	: 16AWG to 30AWG
Screw Torque	: 8lb-inch to 10lb-inch
Connector Mounting	: Panel
Pitch Spacing	: 6.35mm
No. of Contacts	: 4
Contact Material	: Brass
Contact Plating	: Tin
Terminal Type	: Screw
Termination Method	: Vertical
Wire Area Size Max	: 1.3mm ²



Terminal Block

4Way, 10A

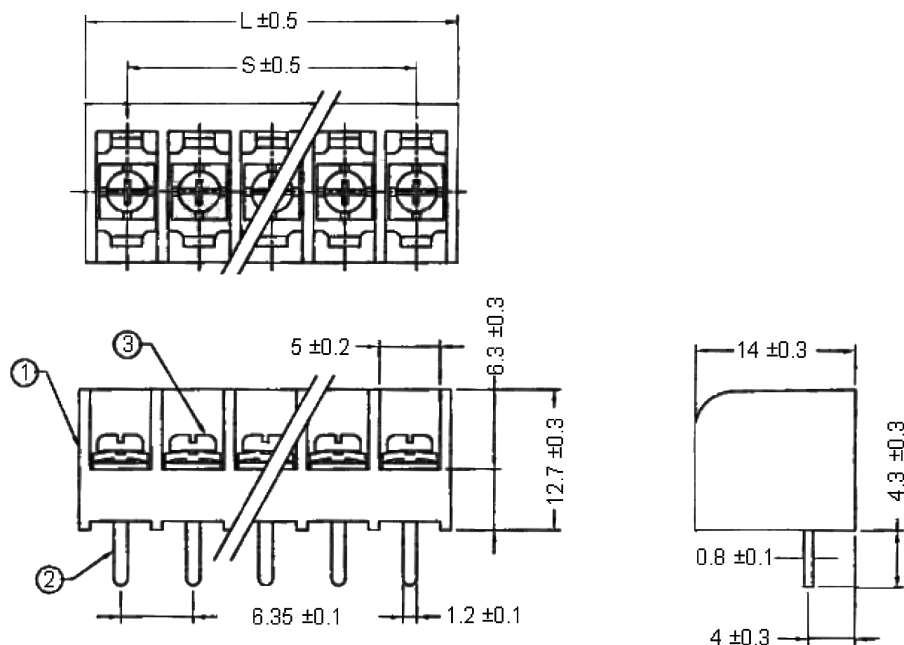

Dimensions

L	S
26.6	19.05

Dimensions : Millimetres

Number	Description	Material	Plating/Finish	Colour
1	Insulating Body	Polyamide 66	-	Black
2	Terminal	Brass	Tin Plated	-
3	Screw	Steel	Ni Plated	

Part Number Table

Description	Part Number
Terminal Block - 4 Way 10A	T40-BS16-04

