


Header 1 Row, Vertical


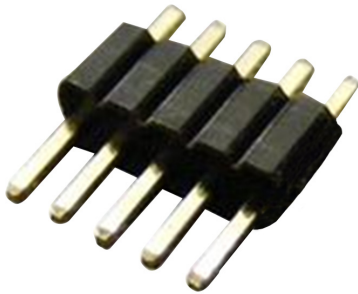


Specifications:


Current rating	: 1A AC/DC
Voltage rating	: 50V AC/DC
Maximum contact resistance	: 20mΩ
Minimum insulation resistance	: 500MΩ
Withstanding voltage	: 500V for one minute
Operating temperature	: -25°C to +105°C

Material:

Insulator	: High temperature plastic (PBT)
Standard colour	: Black
Contact	: Copper alloy
Plated	: Gold plated

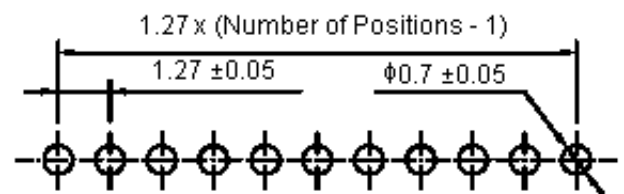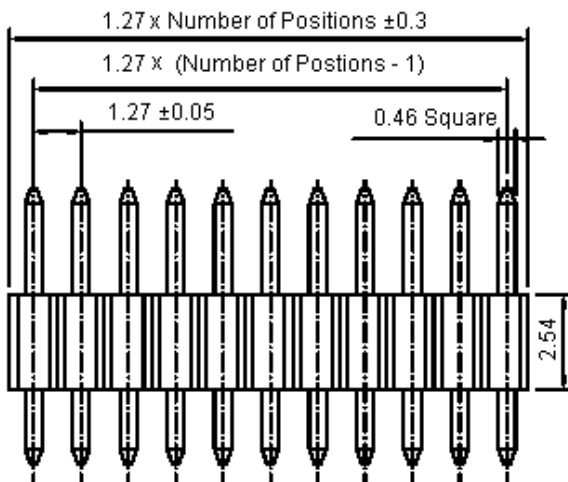

Recommended PCB Layout



Dimensions : Millimetres