


Header

1 Row, R/Angle



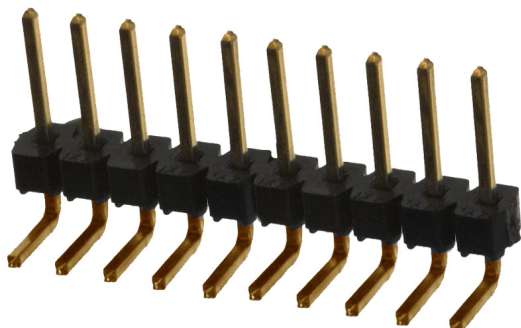


Specifications:

Current rating	: 1A
Voltage rating	: 50V AC/DC
Maximum contact resistance	: 20mΩ
Minimum insulation resistance	: 1,000MΩ
Withstanding voltage	: 500V for one minute
Operating temperature	: -25°C to +105°C

Material:

Insulator	: High temperature Plastic (Nylon PBT)
Standard colour	: Black
Contact	: Copper alloy
Plated	: Gold plated

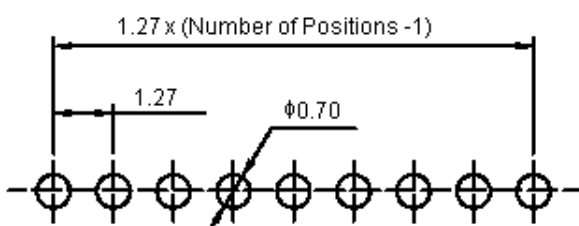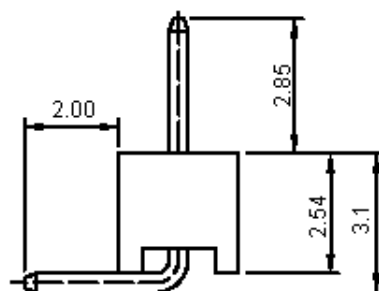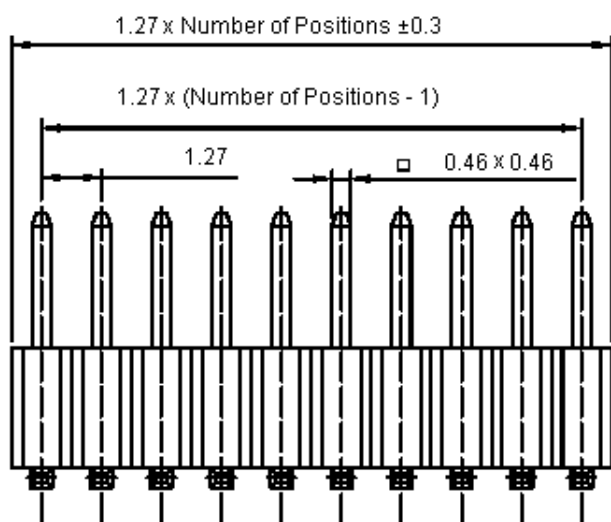

PCB Layout

Dimensions : Millimetres