

Header





Specifications:

Current Rating	: 1A
Voltage Rating	: 50V AC/DC
Maximum Contact Resistance	: 20mΩ
Minimum Insulation Resistance	: 1,000MΩ
Withstanding Voltage	: 500V for one minute
Operating Temperature	: -25°C to +105°C
Pitch Spacing	: 1.27mm
No. of Rows	: 2
No. of Contacts	: 10
Gender	: Plug
Contact Termination	: Solder
Connector Type	: Board to Board

Material:

Insulator	: High Temperature Plastic
Standard Colour	: Black
Contact	: Copper Alloy
Plated	: Gold Plated

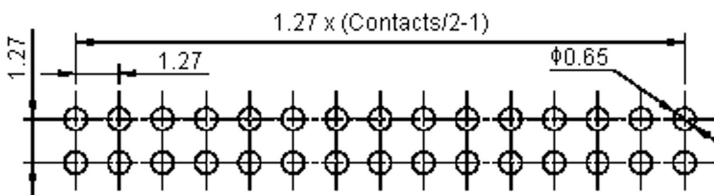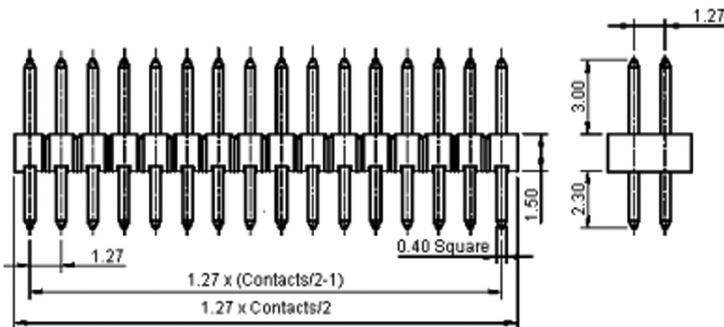

PCB Layout

Dimensions : Millimetres