


Header

2 Row, R/Angle




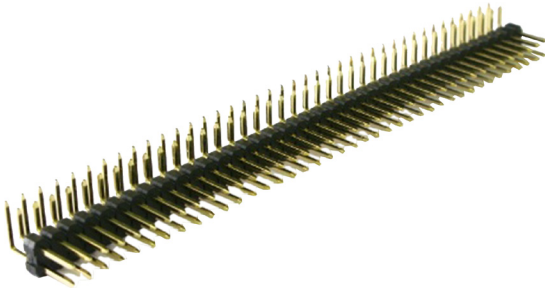


Specifications:

Current Rating	: 1A
Voltage Rating	: 50V AC/DC
Maximum Contact Resistance	: 20mΩ
Minimum Insulation Resistance	: 1,000MΩ
Withstanding Voltage	: 500V for one minute
Operating Temperature	: -25°C to +105°C

Material:

Insulator	: High temperature Plastic (Nylon 6T)
Standard Colour	: Black
Contact	: Copper alloy
Plated	: Gold plated

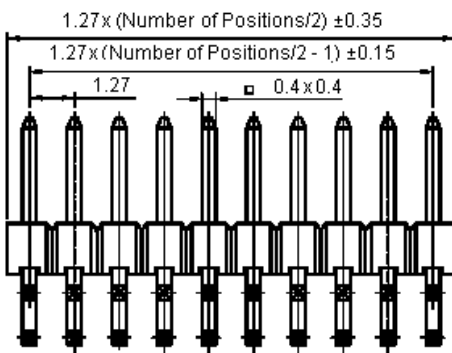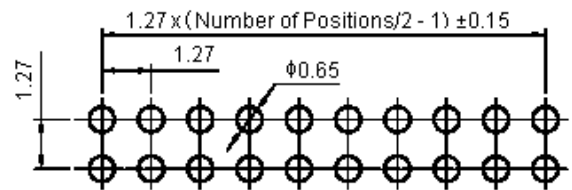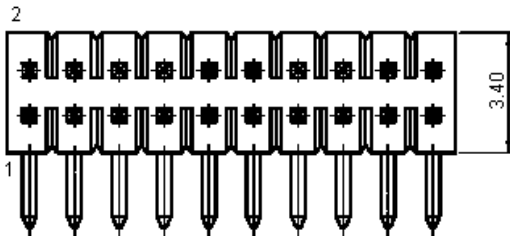

PCB Layout

Dimensions : Millimetres