


## REVISIONS

DOC. NO. SPC-F005 \* Effective: 7/8/02 \* DCP No: 1398

DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
XX	A	Released	LG	14-08-08	JN	14-08-08	JN	14-08-08
2061	B	Specs Updated	JN	07-21-09	JN	07-21-09	JN	07-21-09

## MATERIAL

- 2-1. Frame : Thermoplastic PBT of UL 94V-0
- 2-2. Impeller : Thermoplastic PBT of UL 94V-0
- 2-3. Lead Wire : UL3266, 24awg, GRAY

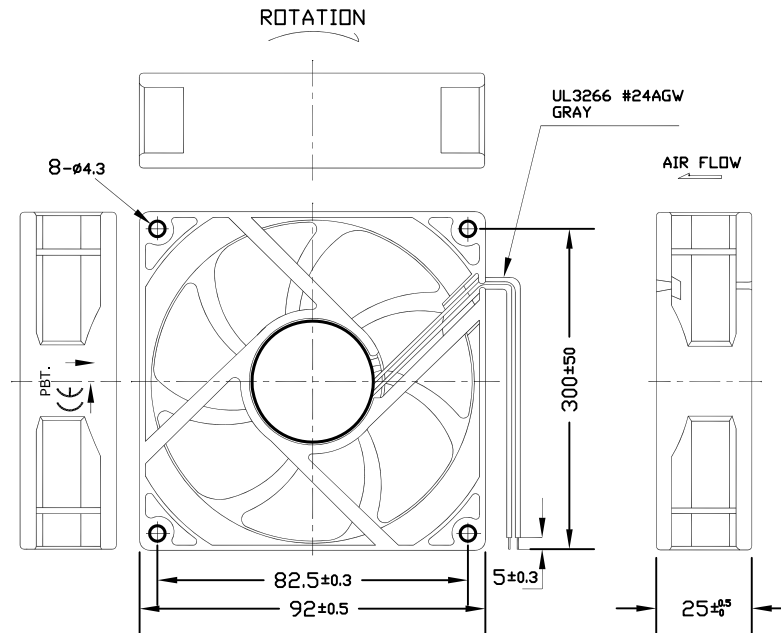

- 1. Air Flow Direction: Toward Label side.
- 2. Best Mounting Direction: Any orientation.



DISCLAIMER:  
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

### TOLERANCES:

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

### DRAWN BY:

LG

### CHECKED BY:

JN

### APPROVED BY:

JN

### DATE:

14-08-08

### DATE:

14-08-08

### DATE:

14-08-08

### DRAWING TITLE:

Axial AC Fan

### SIZE DWG. NO.

A

MC21682

### ELECTRONIC FILE

14M9038

### REV

B

### SCALE: NTS

### U.O.M.: INCHES [mm]

### SHEET: 1 OF 4


## CHARACTERISTICS

- |                          |   |  |
|--------------------------|---|--|
| 1. Motor Design          | : | DC brushless 4 pole motor design.  |
| 2. Insulation Resistance | : | 10Megohms minimum at 500 VDC.  |
| 3. Dielectric Strength   | : | 1500 VAC for one second.   |
| 4. Motor Protection      | : | Impedance protected.   |
| 5. Noise Level           | : | Measured in a semi-anechoic chamber<br>with background noise level below 15dB(A). The fan<br>is running in free air with the microphone at a<br>distance of one meter from the fan intake. |
| 6. Tolerance             | : | ±15% on rated power and current.   |
| 7. Air Performance       | : | Measured by a double chamber. The values<br>are recorded when the fan speed has stabilized at rated<br>voltage.  |



STATIC  
PRESSURE

## PERFORMANCE CURVES

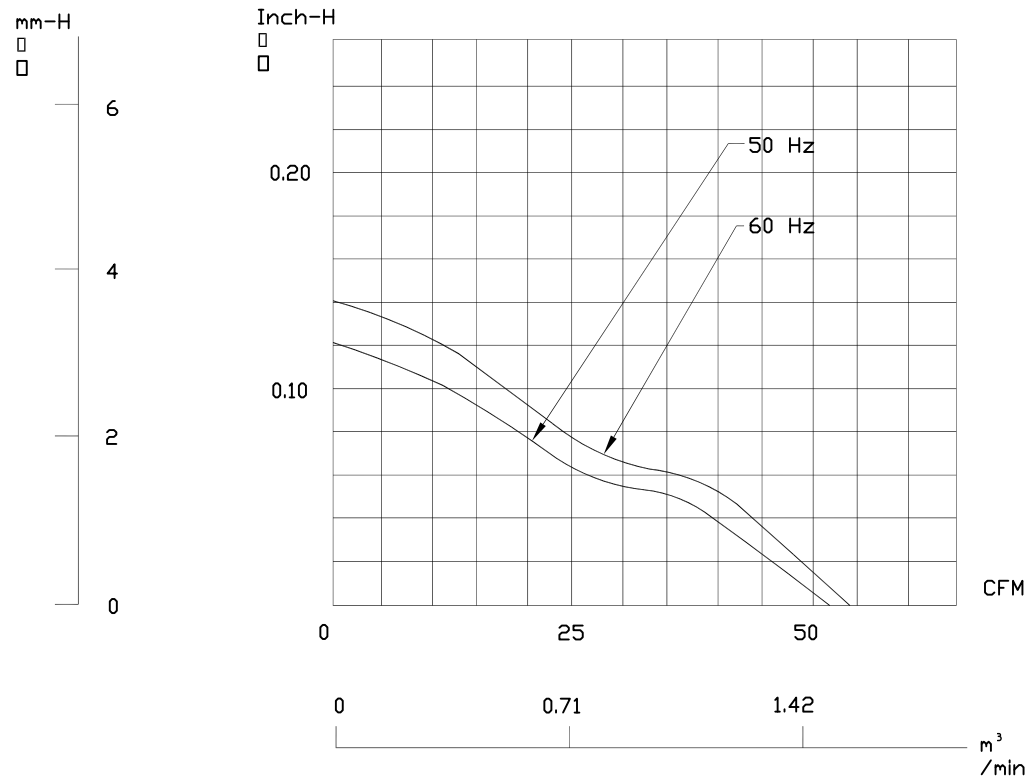

ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

SPC-F005.DWG

DOC. NO. SPC-F005 \* Effective: 7/8/02 \* DCP No: 1398

SIZE  
A

DWG. NO.

MC21682

ELECTRONIC FILE

14M9038

REV

B

SCALE: NTS

U.O.M.: Millimeters

SHEET: 3 OF 4

## SPECIFICATIONS

1-1. Rated Voltage	:	115 VAC 50 Hz	115 VAC 60 Hz
1-2. Operating Voltage Range	:	75~125 VAC	
1-3. Starting Voltage	:	75 VAC (25 deg.C POWER ON/OFF)	
1-4. Rated Speed	:	2900 RPM ±20%	3000 RPM ±20%
1-5. Air Delivery	:	52 CFM	54 CFM
1-6. Static Pressure	:	0.12 Inch-H <sub>2</sub> O	0.14 Inch-H <sub>2</sub> O
1-7. Rated Current	:	245 mA (RMS)	230mA (RMS)
1-8. Input Power	:	3.6 WATTS	3.6 WATTS
1-9. Noise Level	:	31 dB(A)	32 dB(A)
1-10. Direction of Rotation	:	Counter-clockwise viewed from front of fan blade	
1-11. Operating Temperature	:	-10 to +70 deg. C	
1-12. Storage Temperature	:	-40 to +70 deg. C	
1-13. Bearing System	:	Vapo bearing system	
1-14. Weight	:	119.7g	
1-15. Safety	:	UL/CUR Approvals	
1-16. Vibration	:	Vibration of acceleration 1.5G and frequency 5~50~5Hz is applied in all 3 directions(X,Y,Z), in cycles of 1 minute each, for a total vibration time of 30 minutes.	



RoHS  
Compliant

ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

SPC-F005.DWG

DOC. NO. SPC-F005 \* Effective: 7/8/02 \* DCP No: 1398

SIZE <b>A</b>	DWG. NO. <b>MC21682</b>	ELECTRONIC FILE <b>14M9038</b>	REV <b>B</b>
SCALE: NTS	U.O.M.: Millimeters	SHEET: 4 OF 4	