


Speaker Cable

pro-POWER

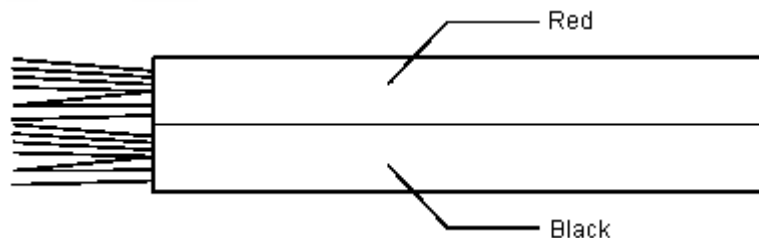

General Tolerances (Unless Specified)

Length : X. ± 1
 . X ± 0.2
 . XX ± 0.1
 Angle : X° . $\pm 1^\circ$
 . X° $\pm 0^\circ 30'$

Specification Table

Construction Item		Unit	Construction Item A
Conductors	Construction	mm	16 / 0.2 ± 0.01
	Material	-	Cu
	Filler Material	-	-
	Outer Diameter	mm	-
Insulators	Material	-	-
	Diameter	mm	-
	Average Thickness	mm	-
	Colour	-	-
Outer Conductors	Type	-	-
	Material	-	-
	Coverage	%	-
	Diameter	mm	-
Jacket	Material	-	PVC
	Diameter	mm	2.3 $\times$ 4.6
	Average Thickness	mm	1.1
	Extrusion	-	-
	Surface	-	-
	Colour	-	Black / Red
Inking	Inking Colour	-	No marking
	Inking	-	
Temperature Rating			-20°C to 60°C
Welding Conditions		350°C to 400 °C / 5 / $\pm 2S$	

Part Number Table

Description	Part Number
Cable, Speaker, 0.5 mm, Red / Black, 100 m	HTC5057-1

pro-POWER