

# LED Panel Mount Indicator, Diffused Red



**RoHS  
Compliant**

## Specifications


Ratings	: 12VDC
Insulation Resistance	: 100MΩ Min. @ 500V DC
Dielectric Strength	: 500VAC/1 minute
Operating Temperature	: -20°C to +80°C
LED Colour	: Green
LED Lens Colour	: Diffused Green
Forward Voltage (VF)	: 3.5V
Forward Current (IF)	: 20mA
Luminous Intensity (Iv)	: 600mcd
View Angle	: 100(degree)
Mounting Type	: Panel
Mounting Hole Dia.	: 16.2mm
Terminal Type	: Quick Connect



## Material Specifications

Frame Material	: PBT, Black
Lens Material	: PMMA, Green
Base Material	: PBT, Black
Terminal Material	: Brass, Nickel Plated

## Diagram

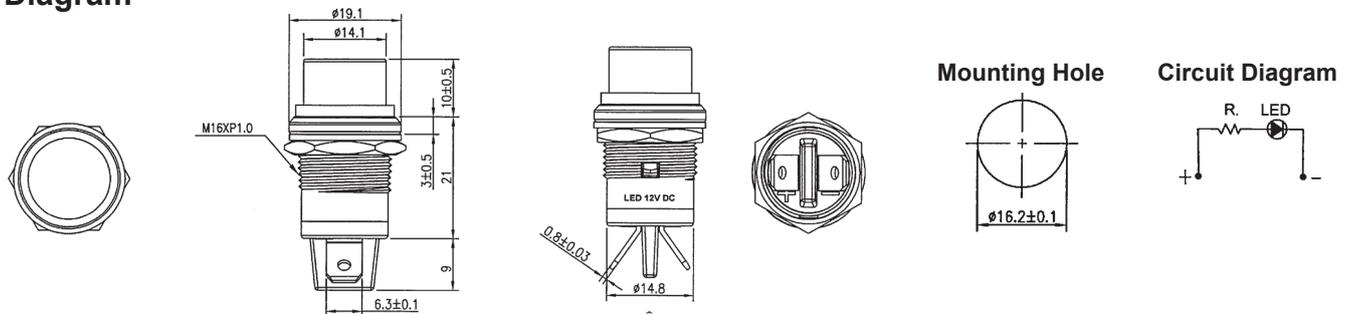

Dimensions : Millimetres  
Tolerances ±0.3mm

## Part Number Table

Description	Part Number
LED Panel Mount Indicator, Diffused Green, 16.2mm, 12VDC, 0.02A, 600mcd	MCR9-124LB-01-G

