

LED Panel Mount Indicator, Diffused Red




**RoHS
Compliant**



Specifications

Ratings	: 12V DC
Insulation Resistance	: 100MΩ Min. @ 500V DC
Dielectric Strength	: 500V AC/1 minute
Operating Temperature	: -20°C to +80°C
LED Colour	: Red
LED Lens Colour	: Diffused Red
Forward Voltage (VF)	: 2.2V
Forward Current (IF)	: 20mA
Luminous Intensity (Iv)	: 120mcd
View Angle	: 100(degree)
Mounting Type	: Panel
Mounting Hole Dia.	: 16.2mm
Terminal Type	: Quick Connect
Lens Material	: PMMA, Red
Housing Material	: PBT, Black

Diagram

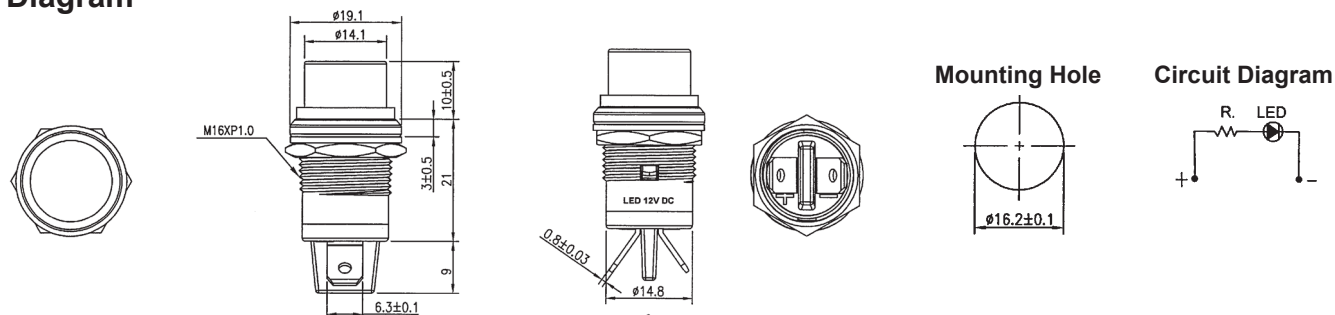

Dimensions : Millimetres
Tolerances ±0.3mm

Part Number Table

Description	Part Number
LED Panel Mount Indicator, Diffused Red, 16.2mm, 12VDC, 0.02A, 120mcd	MCR9-124LB-01-R

