
ET-965 5-in-1 Multi-Function Environment Meter

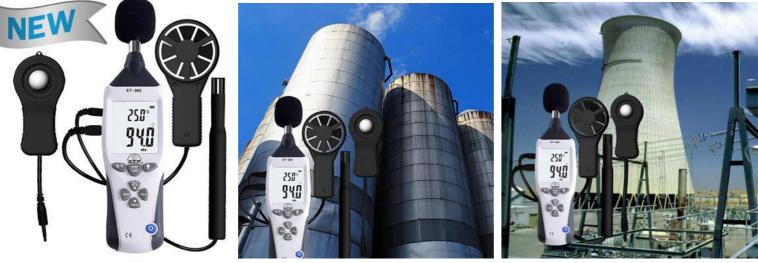

Product description

This 5-in-1 multi-function environment meter is a cost-effective introduction to aid conformance to health & safety in the work place. It measures sound levels, light levels, airflow, %RH and temperature. The LCD display has a backlight, large digits and function indicators.

- Auto Ranges for sound with 'A' frequency weighting
- Cosine corrected silicon diode sensor for Lux Levels
- 70mm Vane for airflow
- · Semiconductor sensors in the probe for humidity and ambient temperature measurements
- °C or °F temperature measurements
- 55mm LCD display with backlight and function indicators
- Data Hold function freezes displayed value
- Max Hold displays highest measured value
- Max memory displays highest measured value since power on
- Auto power-off
- Low Battery indication
- Standard 4mm camera bush for tripod mounting
- 2 Year Warranty

• Supplied in a briefcase carry case with Lux probe, 70mm Vane, Humidity/Temperature probe, wind muffler and battery

Sound	Lux	Airflow	%RH	Temp
05.0			/0111	remp
35 to	0 to 200,000	0.5 to 30m/s	10 to	-40° to
130dB	0.01 Lux	0.1	95%RH	70°C
0.1dB	±4%, ±5%	±3%, ±0.3Dg	0.1%	0.1°C
±2dB	F/s		±5%RH	±2°C
1x 9V PP3 A	Ikaline Battery	(LR-61)		
252 x 66 x 33mm				
568g				
	0.1dB ±2dB 1x 9V PP3 A 252 x 66 x 3	130dB 0.01 Lux 0.1dB ±4%, ±5% ±2dB F/s 1x 9V PP3 Alkaline Battery 252 x 66 x 33mm	130dB 0.01 Lux 0.1 0.1dB ±4%, ±5% ±3%, ±0.3Dg ±2dB F/s 1x 9V PP3 Alkaline Battery (LR-61) 252 x 66 x 33mm	130dB 0.01 Lux 0.1 95%RH 0.1dB ±4%, ±5% ±3%, ±0.3Dg 0.1% ±2dB F/s ±5%RH 1x 9V PP3 Alkaline Battery (LR-61) 252 x 66 x 33mm

TECHNICAL SPECIFICATION