

Solder Sleeve Wire Splices Heat Shrink Tube Kit, 90 Pcs

DURATOOL



Features

- Shrinkage ratio:2:1
- Waterproof for wiring splices
- Easy control soldering process
- Transparent sleeve provides precise inspection

Specifications

Operating Temperature	: -55°C to +105°C
Min. Shrink Temperature	: 60°C
Min. Fully Recovery Temperature	: 125°C
Starting Temperature of Solder Melt	: 110°C

Contents


Solder Sleeve Wire Splices Heat Shrink Tube (1.8mm × 25mm) - White 30 PCs.

Solder Sleeve Wire Splices Heat Shrink Tube (2.8mm × 40mm) - Red 30 PCs.


Solder Sleeve Wire Splices Heat Shrink Tube (4.8mm × 40mm) - Blue 20 PCs.

Solder Sleeve Wire Splices Heat Shrink Tube (6.2mm × 40mm) - Yellow 10 PCs.

Diagram

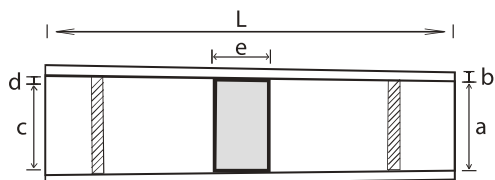

Colour	Cable Size		As Supplied (mm)		Solder Sleeve (mm)			Length (L) mm
	AWG	mm ²	I.D. (a)	Average W.T. (b)	I.D. (c)	Average W.T. (d)	Height (e)	
White	26-24	0.25-0.34	3 ±0.1	0.25 ±0.05	1.8 ±0.1	0.35 ±0.05	1.7 ±0.1	25 ±0.5
Red	22-18	0.5-1	4.4 ±0.2	0.4 ±0.05	2.8 ±0.1	0.55 ±0.05	3.2 ±0.1	40 ±0.5
Blue	16-14	1.5-2.5	6.5 ±0.2	0.3 ±0.05	4.8 ±0.1	0.55 ±0.05	4.2 ±0.1	40 ±0.5
Yellow	12-10	4-6	7.8 ±0.2	0.5 ±0.05	6.2 ±0.1	0.55 ±0.05	4.2 ±0.1	40 ±0.5




1. Heat shrinkable tubing
2. Low temperature solder sleeve
3. Waterproof hot melt adhesive

DURATOOL

Solder Sleeve Wire Splices Heat Shrink Tube Kit, 90 Pcs

DURATOOL



- Material: Tin
- Waterproof for wiring splices; Material: Adhesive
- Material: PE

Part Number Table

Description	Part Number
90 Pcs, Solder Sleeve Wire Splices Heat Shrink Tube Kit	21-19555

DURATOOL