


# USB 2.0

**RoHS  
Compliant**



## Specifications:

Insulation Resistance : DC 300V, 10MΩ  
 Contactor Resistance : 3Ω Max.  
 Dielectric Strength : 100V AC/Minute, 1mA  
 Printing : USB 2.0 Cable, 28AWG × 1P + 28AWG × 2C

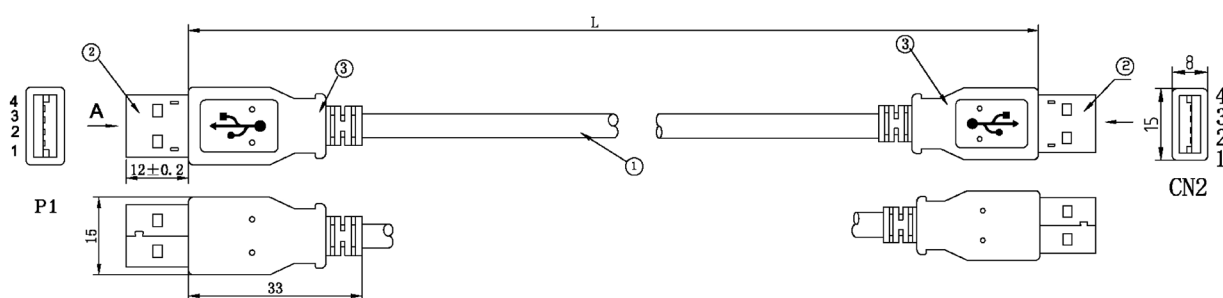

Dimensions : Millimetres

L = 1,800mm ±30mm

| No. | Parts      | Standard Specification                                                                                        | QTY |
|-----|------------|---------------------------------------------------------------------------------------------------------------|-----|
| 1   | Cable      | USB 2.0AWG (7/0.12BC × 1P) + 28AWG (7/0.12BC × 2C) +AB B=0.12/3 × 16 AL-MG Jacket : PVC/White OD : 3.8 ±0.2mm | 1   |
| 2   | USB A Type | USB A/M Type, The Pin Gold Plating 30μ", the shell for Nickel Plating                                         | 2   |
| 3   | Outer Mold | Shore 88A PVC Colour : White                                                                                  | 2   |

## Part Number Table

| Description                         | Part Number |
|-------------------------------------|-------------|
| Computer Cable, USB2.0, 1.8m, White | 11.99.8919  |