


USB 2.0

**RoHS
Compliant**



Specifications:

Insulation Resistance : DC 300V, 10MΩ
 Contactor Resistance : 5Ω Max.
 Dielectric Strength : 100V AC/Minute, 1mA
 Printing : USB 2.0 Cable, 28AWG × 1P + 28AWG × 2C

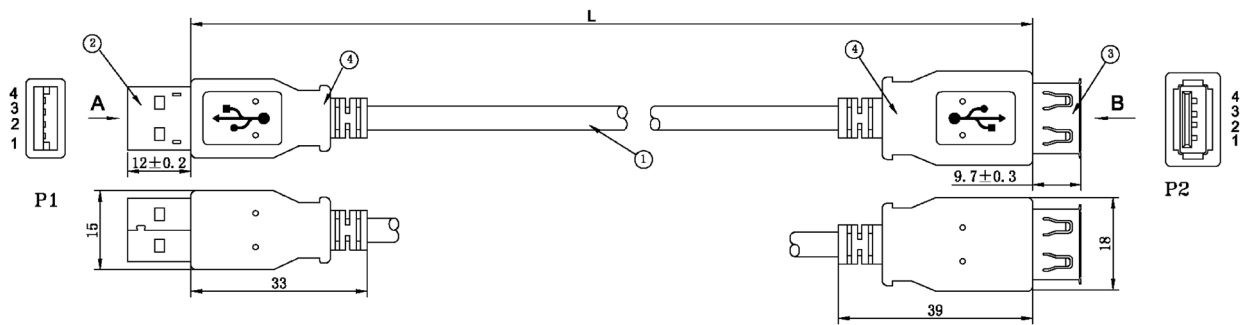

Dimensions : Millimetres

L = 3,000mm ±50mm

| No. | Parts | Standard Specification | QTY |
|-----|------------|---|-----|
| 1 | Cable | USB 2.0AWG (7/0.12BC × 1P) + 28AWG (7/0.12BC × 2C) +AEB B=0.12/3 × 16 AL-MG E=7/0.12BC Jacket : PVC/White OD : 3.8mm ±0.2mm | 1 |
| 2 | USB A Type | USB A/M Type, The Pin Gold Plating 30μ", the shell for Nickel Plating | 1 |
| 3 | USB B Type | USB B/M Type, The Pin Gold Plating 30μ", the shell for Nickel Plating | 1 |
| 4 | Outer Mold | Shore 88A PVC Colour : White | 2 |

Part Number Table

| Description | Part Number |
|-----------------------------------|-------------|
| Computer Cable, USB2.0, 3m, White | 11.99.8961 |