

Electro Mech Buzzer

multicomp^{PRO}

**RoHS
Compliant**

Features

- Electro mechanical, surface mount buzzer
- The sound opening is on the side of the buzzer rather than the top
- Black in colour
- Wave solderable, not washable
- Small and compact, this low profile buzzer is suitable for applications where space is limited



Specifications

Lead pin Material	: Red copper (DSn)
Rated Voltage (Vp-p square wave)	: 3Vp-p
Operating Voltage	: 2Vp-p ~ 4Vp-p
Rated Current*	: ≤100mA
Sound Output at 3000Hz at 10cm*	: ≥85dB
Resonant frequency*	: 2731 Hz
Coil Resistance	: 15 ±3Ω
Operating Temperature	: -30°C to +70°C
Storage Temperature	: -40°C to +85°C
Weight	: 0.7g

*Value applying at rated voltage (AC)

Requires additional electronic circuitry to operate as a sounder

Diagram

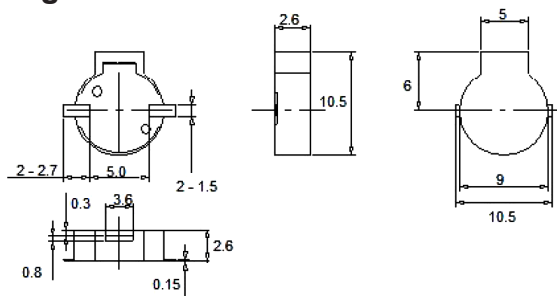

1. Coil part - Copper and Iron
2. Diaphragm - Iron
3. Csse - LCP
4. Magnet- Ferrite
5. Cover - LCP

Dimensions: Millimetres
Tolerance: ±0.5mm

Part Number Table

Description	Part Number
Electro Mech Buzzer, SMD, 2-4VP-P, 85dB	ABT-461-RC

multicomp^{PRO}