

Piezo Transducer Sounder

multicompPRO


**RoHS
Compliant**



Specifications:

Operating Voltage	: 1-25Vp-p
Rated Voltage (Square Wave)	: 3Vp-p
*Rated Current at rated voltage Max	: 1mA
*Min Sound Output at 4kHz 10cm	: ≥75dB
*Resonant Frequency	: 4,000 ±500Hz
Capacitance at 120Hz	: 15,000 ±30%pF
Operating Temperature	: -30°C to +70°C
Storage Temperature	: -40°C to +85°C
Weight	: 0.4g
Housing Material	: LCP
Tone Nature	: Single
Connection	: SMD

*Value Applying at Rated Voltage (resonant frequency, ½ duty, square wave)

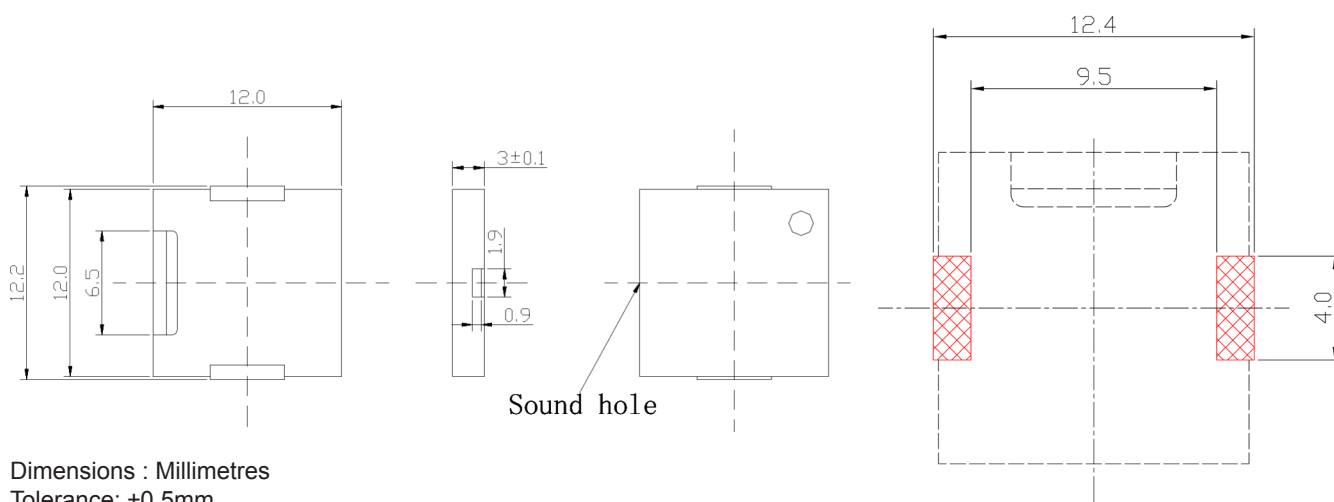

Part Number Table

Description	Part Number
Sounder, Piezo, 3VP-P, Surface Mount	MCABT-458-RC

multicompPRO